MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Reference package for procurement and maintenance review

SIEMENS

6ES7131-6BH01-0BA0

SIXTEEN-CHANNEL DIGITAL INPUT MODULE

Used with the applicable SIMATIC ET 200SP configuration.

REFERENCE PACKAGE

OFFICIAL DOCUMENT

Selected official manufacturer pages follow this cover.

Source: Siemens official technical documentation for 6ES7131-6BH01-0BA0

Product overview

2


2.1 Properties

Article number

6ES7131-6BH01-0BA0 (number in package unit: 1 unit)

6ES7131-6BH01-2BA0 (number in package unit: 10 units)

View of the module

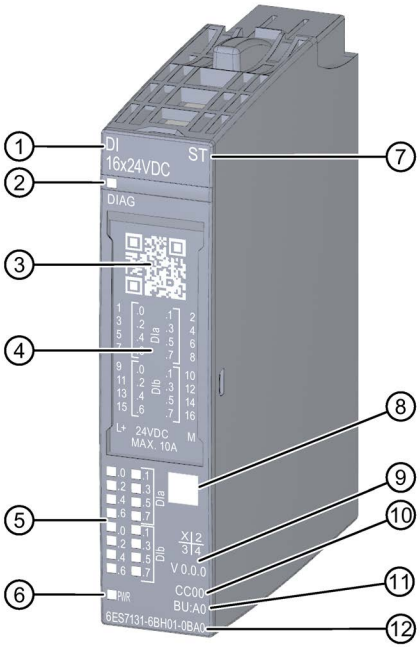

① Module type and name
② LED for diagnostics
③ 2D matrix code
④ Wiring diagram
⑤ LEDs for channel status
⑥ LED for supply voltage
⑦ Function class
⑧ Color coding module type
⑨ Function and firmware version
⑩ Color code for selecting the color identification labels
⑪ BU type
⑫ Article number

Figure 2-1 View of the module DI 16×24VDC ST

Technical specifications

6

6.1 Technical specifications

Technical specifications of the DI 16×24VDC ST

Article number	6ES7131-6BH01-0BA0
General information	
Product type designation	DI 16x24 VDC ST
Firmware version	V0.0
• FW update possible	No
usable BaseUnits	BU type A0
Color code for module-specific color identification plate	CC00
Product function	
• I&M data	Yes; I&M0 to I&M3
Engineering with	
• STEP 7 TIA Portal configurable/integrated as of version	V14
• STEP 7 configurable/integrated as of version	V5.5 SP3
• PCS 7 configurable/integrated as of version	V8.1 SP1
• PROFIBUS as of GSD version/GSD revision	One GSD file each, Revision 3 and 5 and higher
• PROFINET as of GSD version/GSD revision	GSDML V2.3
Operating mode	
• DI	Yes
• Counter	No
• Oversampling	No
• MSI	No
Supply voltage	
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
Reverse polarity protection	Yes

Article number	**6ES7131-6BH01-0BA0**
Input current	
Current consumption, max.	90 mA
24 V encoder supply	
• 24 V	No
Power loss	
Power loss, typ.	1.7 W
Address area	
Address space per module	
• Inputs	2 byte; + 2 bytes for QI information
Hardware configuration	
Automatic encoding	Yes
• Mechanical coding element	Yes
Submodules	
• Number of configurable submodules, max.	4
Selection of BaseUnit for connection variants	
• 1-wire connection	BU type A0
• 2-wire connection	BU type A0 + Potential isolation module
• 3-wire connection	BU type A0 + Potential isolation module
• 4-wire connection	BU type A0 + Potential isolation module
Digital inputs	
Number of digital inputs	16
Digital inputs, parameterizable	Yes
Source/sink input	P-reading
Input characteristic curve in accordance with IEC 61131, type 3	Yes
Input voltage	
• Type of input voltage	DC
• Rated value (DC)	24 V
• for signal "0"	-30 to +5V
• for signal "1"	+11 to +30V
Input current	
• for signal "1", typ.	2.5 mA

Article number	**6ES7131-6BH01-0BA0**
Input delay (for rated value of input voltage) for standard inputs	
– parameterizable	Yes; 0.05 / 0.1 / 0.4 / 0.8 / 1.6 / 3.2 / 12.8 / 20 ms (in each case + delay of 30 to 500 µs, depending on line length)
– at "0" to "1", min.	0.05 ms
– at "0" to "1", max.	20 ms
– at "1" to "0", min.	0.05 ms
– at "1" to "0", max.	20 ms
Cable length	
• shielded, max.	1 000 m
• unshielded, max.	600 m
Encoder	
Connectable encoders	
• 2-wire sensor	Yes
– permissible quiescent current (2-wire sensor), max.	1.5 mA
Isochronous mode	
Isochronous operation (application synchronized up to terminal)	No
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostic messages	
• Diagnostic information readable	Yes
• Monitoring the supply voltage	Yes
– parameterizable	Yes
• Monitoring of encoder power supply	No
• Wire-break	Yes; Module-by-module, optional protective circuit for preventing wire-break diagnostics in the case of simple encoder contacts: 25 kOhm to 45 kOhm
• Short-circuit	No
• Group error	Yes

Article number	**6ES7131-6BH01-0BA0**
Diagnostics indication LED	
• Monitoring of the supply voltage (PWR-LED)	Yes; green PWR LED
• Channel status display	Yes; Green LED
• for channel diagnostics	No
• for module diagnostics	Yes; green/red DIAG LED
Potential separation	
Potential separation channels	
• between the channels	No
• between the channels and backplane bus	Yes
• between the channels and the power supply of the electronics	No
Isolation	
Isolation tested with	707 V DC (type test)
Ambient conditions	
Ambient temperature during operation	
• horizontal installation, min.	0 °C
• horizontal installation, max.	60 °C
• vertical installation, min.	0 °C
• vertical installation, max.	50 °C
Altitude during operation based on sea level	
• Ambient air temperature-barometric pressure-altitude	On request: Ambient temperatures lower than 0 °C (without condensation) and/or installation altitudes greater than 2 000 m
Dimensions	
Width	15 mm
Height	73 mm
Depth	58 mm
Weights	
Weight, approx.	28 g

Dimension drawing

See manual ET 200SP BaseUnits
(http://support.automation.siemens.com/WW/view/en/59753521)