

OFFICIAL DOCUMENT PACKAGE

Manufacturer's Manual

Amikon cover with selected official ABB technical pages

ABB AC500 / S500 I/O

DA502

MIXED SIGNAL OUTPUT MODULE

Selected official pages retain the original technical tables, ratings, notes and pagination.

OFFICIAL SOURCE

ABB 3ADR010040 rev.14, 2025-11-28, DA502 original instructions

DA502 ordering and digital/analog technical specifications, original pages 1-9

This technical extract does not replace the complete equipment and system manuals. Check the installed hardware and project before use.

DA502

Digital/analog input/output module




1 Ordering data

Part no.	Description	Product life cycle phase *)
1SAP 250 800 R0001	DA502, digital/analog input/output module, 16 DO, 8 DC, 4 AI, 2 AO	Active
1SAP 450 800 R0001	DA502-XC, digital/analog input/output module, 16 DO, 8 DC, 4 AI, 2 AO, XC version	Active



*) Modules in lifecycle Classic are available from stock but not recommended for planning and commissioning of new installations.

2 Dimensions

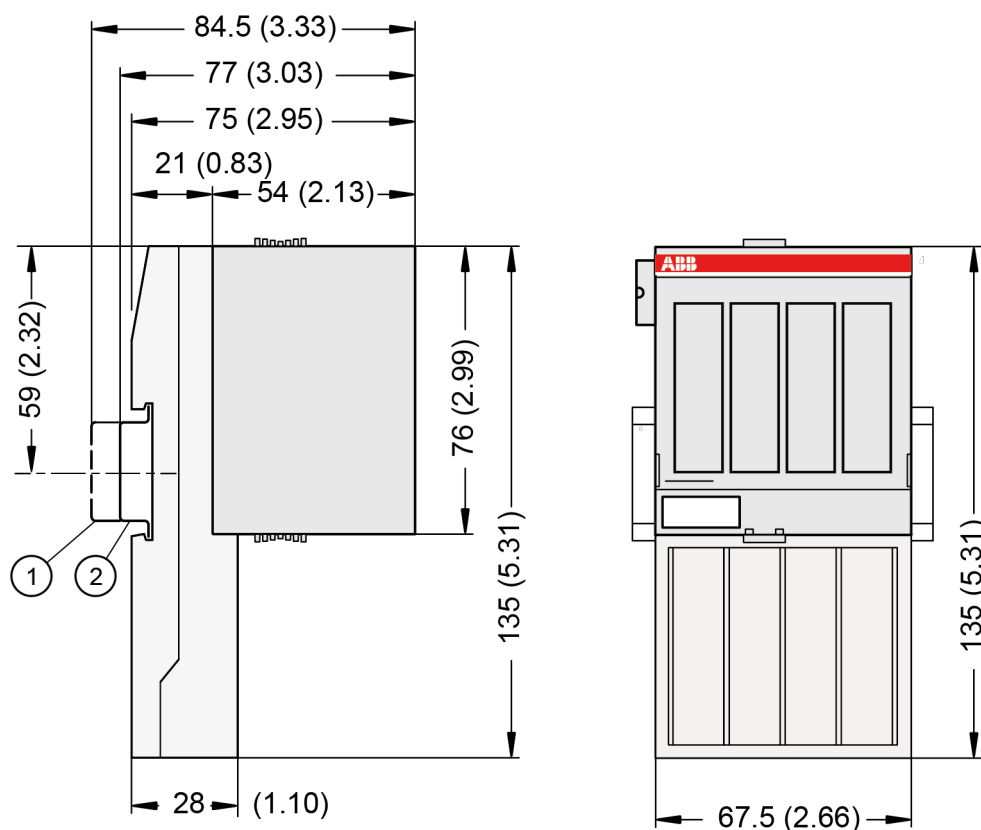

The dimensions are in mm and in brackets in inch.

3 Technical data

3.1 Technical data of the module

Parameter	Value
Fast counter	Integrated, many configurable operating modes
Power supply	From the process supply voltage UP
LED displays	For system displays, signal states, errors and power supply
Internal supply voltage	Via the I/O bus interface (I/O bus)
External supply voltage	Via terminals UP and ZP (process supply voltage 24 V DC)
Effect of incorrect input terminal connection	Wrong or no signal detected, no damage up to 35 V
Required terminal unit	TU515 or TU516

The system data of AC500 and S500 is applicable to the standard version.

🔗 *Chapter 4 “System data AC500” on page 9*

The system data of AC500-XC is applicable to the XC version.

🔗 *Chapter 5 “System data AC500-XC” on page 13*

Only deviating specifications are therefore described here.

The technical data is also applicable to the XC version.

Parameter		Value
Process supply voltage		
	Connections	Terminals 1.8, 2.8, 3.8 and 4.8 for UP (+24 V DC) and 1.9, 2.9, 3.9 and 4.9 for ZP (0 V)
	Protection against reverse voltage	yes
	Rated protection fuse at UP	10 A fast
	Rated value	24 V DC
	Max. ripple	5 %
Current consumption		
	From UP	0.07 A + max. 0.5 A per output
	From 24 V DC power supply at the terminals UP/L+ and ZP/M of the CPU/communication interface module	ca. 2 mA
	Inrush current from UP (at power-up)	0.04 A ² s
Galvanic isolation		
	between the channels	No
	between the channels and I/O bus	Yes
	between the channels and process supply voltage (UP, ZP)	No
Max. power dissipation within the module		6 W (outputs unloaded)
Weight (without terminal unit)		ca. 125 g
Mounting position		Horizontal mounting or Vertical mounting with derating (output load reduced to 50% at +40 °C)
Cooling		The natural convection cooling must not be hindered by cable ducts or other parts in the control cabinet.



NOTICE!

All I/O channels (digital and analog) are protected against reverse polarity, reverse supply, short circuit and temporary overvoltage up to 30 V DC.



Multiple overloads

With multi-channel modules, there are no effects of multiple overloads as each digital output channel is individually protected by an internal intelligent high-side switch.

3.2 Technical data of the digital outputs

Parameter		Value
Number of channels per module		16 outputs (with transistors)
Distribution of the channels into groups		1 group of 16 channels
Connection of the channels		
	DO0 ... DO7	Terminals 1.0 ... 1.7
	DO8 ... DO15	Terminals 2.0 ... 2.7
Indication of the output signals		1 yellow LED per channel, the LED is ON if the output signal is high (signal 1)
Monitoring point of output indicator		LED is controlled by process CPU
Reference potential for all outputs		Terminals 1.9, 2.9, 3.9 and 4.9 (negative pole of the process supply voltage, signal name ZP)
Common power supply voltage		For all outputs: terminals 1.8, 2.8, 3.8 and 4.8 (positive pole of the process supply voltage, signal name UP)
Output voltage for signal 1		UP (-0.8 V)
Output delay (0->1 or 1->0)		On request
Output current		
	Rated value, per channel	500 mA at UP = 24 V
	Maximum value (channels O0 to O15)	4 A
Leakage current with signal 0		< 0.5 mA
Rated protection fuse on UP		10 A fast
Demagnetization when inductive loads are switched off		With varistors integrated in the module (see figure below)
Switching frequency		
	With resistive load	On request
	With inductive loads	Max. 0.5 Hz
	With lamp loads	Max. 11 Hz with max. 5 W
Short-circuit-proof / overload-proof		Yes
Overload message ($I > 0.7 \text{ A}$)		Yes, after ca. 100 ms
Output current limitation		Yes, automatic reactivation after short circuit/overload
Resistance to feedback against 24 V signals		Yes
Max. cable length		
	Shielded	1000 m
	Unshielded	600 m

3.3 Technical data of the configurable digital inputs/outputs

Each of the configurable digital I/O channels can be defined as input or output by the user program. This is done by interrogating or allocating the corresponding channel.

Parameter	Value
Number of channels per module	8 inputs/outputs (with transistors)
Distribution of the channels into groups	1 group for 8 channels
If the channels are used as inputs	
Channels DC16 ... DC23	Terminals 4.0 ... 4.7
If the channels are used as outputs	
Channels DC16 ... DC23	Terminals 4.0 ... 4.7
Indication of the input/output signals	1 yellow LED per channel, the LED is ON when the input/output signal is high (signal 1)
Monitoring point of input/output indicator	LED is part of the input circuitry
Galvanic isolation	Yes, per module

3.3.1 Technical data of the digital inputs/outputs if used as inputs

Parameter	Value
Number of channels per module	8
Distribution of the channels into groups	1 group of 8 channels
Terminals of the channels DC16 ... DC23	Terminals 4.0 ... 4.7
Reference potential for all inputs	Terminals 1.9 ... 4.9 (Negative pole of the supply voltage, signal name ZP)
Indication of the input signals	1 yellow LED per channel, the LED is ON when the input signal is high (signal 1)
Monitoring point of input/output indicator	LED is part of the input circuitry
Input type (according EN 61131-2)	Type 1
Input delay (0->1 or 1->0)	Typ. 0.1 ms, configurable from 0.1 ms ... 32 ms
Input signal voltage	24 V DC
0-Signal	-3 V ... +5 V
Undefined Signal	> +5 V ... < +15 V
1-Signal	+15 V ... +30 V
Ripple with signal 0	Within -3 V ... +5 V
Ripple with signal 1	Within +15 V ... +30 V
Input current per channel	
Input voltage +24 V	Typ. 5 mA
Input voltage +5 V	> 1 mA
Input voltage +15 V	> 2 mA
Input voltage +30 V	< 8 mA
Max. cable length	
Shielded	1000 m
Unshielded	600 m

* Due to the direct connection to the output, the demagnetizing varistor is also effective at the input (see figure) above. This is why the difference between UPx and the input signal must not exceed the clamp voltage of the varistor. The varistor limits the clamp voltage to approx. 36 V. Consequently the input voltage must be within the following range.

- If $UP_x = 24\text{ V}$, the input voltage must range from $-12\text{ V} \dots +30\text{ V}$.
- If $UP_x = 30\text{ V}$, the input voltage must range from $-6\text{ V} \dots +30\text{ V}$.

3.3.2 Technical data of the digital inputs/outputs if used as outputs

Parameter	Value
Number of channels per module	8
Distribution of the channels into groups	1 group of 8 channels
Terminals of the channels DC16 ... DC23	Terminals 4.0 ... 4.7
Reference potential for all outputs	Terminals 1.9 ... 4.9 (negative pole of the supply voltage, signal name ZP)
Common power supply voltage	For all outputs terminals 1.8, 2.8, 3.8 and 4.8 (positive pole of the supply voltage, signal name UP)
Output voltage for signal 1	UP (-0.8 V)
Output delay (0->1 or 1->0)	On request
Output current	
rated value per channel	500 mA at $UP = 24\text{ V}$
max. value (all channels together)	4 A
Leakage current with signal 0	$< 0.5\text{ mA}$
Fuse for UP	10 A fast
Demagnetization with inductive DC load	Via internal varistors (see figure below this table)
Output switching frequency	
With resistive load	On request
With inductive loads	Max. 0.5 Hz
With lamp loads	11 Hz max. at 5 W max.
Short-circuit-proof / overload-proof	Yes
Overload message ($I > 0.7\text{ A}$)	Yes, after ca. 100 ms
Output current limitation	Yes, automatic reactivation after short circuit/overload
Resistance to feedback against 24 V signals	Yes (software-controlled supervision)
Max. cable length	
Shielded	1000 m
Unshielded	600 m

The following drawing shows the circuitry of a digital input/output with the varistors for demagnetization when inductive loads are switched off.

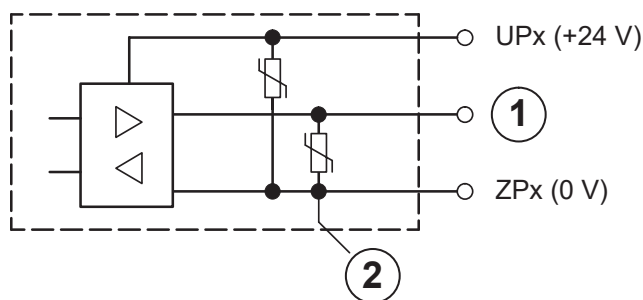


Fig. 1: Digital input/output (circuit diagram)

- 1 Digital input/output
- 2 For demagnetization when inductive loads are turned off

3.4 Technical data of the fast counter



The fast counter of the module does not work if the module is connected to a CS31 bus module.

Parameter	Value
Counting frequency	Max. 50 kHz

3.5 Technical data of the analog inputs

Parameter	Value
Number of channels per module	4
Distribution of channels into groups	1 group with 4 channels
Connection if channels AI0+ ... AI3+	Terminals 3.0 ... 3.3
Reference potential for AI0+ ... AI3+	Terminal 3.4 (AI-) for voltage and RTD measurement Terminal 1.9, 2.9, 3.9 and 4.9 for current measurement
Input type	
Unipolar	Voltage 0 V ... 10 V, current or Pt100/Pt1000/Ni1000
Bipolar	Voltage -10 V ... +10 V
Configurability	0 V ... 10 V, -10 V ... +10 V, 0 mA ... 20 mA, 4 mA ... 20 mA, Pt100/1000, Ni1000 (each input can be configured individually)
Channel input resistance	Voltage: > 100 kΩ Current: ca. 330 Ω
Time constant of the input filter	Voltage: 100 μs Current: 100 μs

Parameter	Value
Indication of the input signals	1 LED per channel (brightness depends on the value of the analog signal)
Conversion cycle	1 ms (for 4 inputs + 2 outputs); with RTDs Pt/Ni... 1 s
Resolution	Range 0 V ... 10 V: 12 bits Range -10 V ... +10 V: 12 bits including sign Range 0 mA ... 20 mA: 12 bits Range 4 mA ... 20 mA: 12 bits Range RTD (Pt100, PT1000, Ni1000): +0.1 °C
Conversion error of the analog values caused by non-linearity, adjustment error at factory and resolution within the normal range	Typ. 0.5 %, max. 1 % For XC version below 0 °C and above +60 °C: on request
Relationship between input signal and hex code	
Unused inputs	Are configured as "unused" (default value)
Overvoltage protection	Yes

3.6 Technical data of the analog inputs, if used as digital inputs

Parameter	Value
Number of channels per module	Max. 4
Distribution of channels into groups	1 group of 4 channels
Connections of the channels AI0+ ... AI3+	Terminals 3.0... 3.3
Reference potential for the inputs	Terminals 1.9, 2.9, 3.9 and 4.9 (ZP)
Indication of the input signals	1 LED per channel
Input signal voltage	24 V DC
Signal 0	-30 V ... +5 V
Undefined signal	+5 V ... +13 V
Signal 1	+13 V ... +30 V
Input current per channel	
Input voltage +24 V	Typ. 7 mA
Input voltage +5 V	Typ. 1.4 mA
Input voltage +15 V	Typ. 3.7 mA
Input voltage +30 V	< 9 mA
Input resistance	ca. 3.5 kΩ

3.7 Technical data of the analog outputs

Parameter	Value
Number of channels per module	2
Distribution of channels into groups	1 group for 2 channels
Connection of the channels AO0+ ... AO1+	Terminals 3.5 and 3.6

Parameter	Value
Reference potential for AO0+ ... AO1+	Terminal 3.7 (AO-) for voltage output Terminals 1.9, 2.9, 3.9 and 4.9 for current output
Output type	
Unipolar	Current
Bipolar	Voltage
Galvanic isolation	Against internal supply and other modules
Configurability	-10 V ... +10 V, 0 mA ... 20 mA, 4 mA ... 20 mA (each output can be configured individually)
Output resistance (load), as current output	0 Ω ... 500 Ω
Output loadability, as voltage output	$\pm$ 10 mA max.
Indication of the output signals	1 LED per channel (brightness depends on the value of the analog signal)
Resolution	12 bits including sign
Settling time for full range change (resistive load, output signal within specified tolerance)	Typ. 5 ms
Conversion error of the analog values caused by non-linearity, adjustment error at factory and resolution within the normal range	Typ. 0.5 %, max. 1 %
Relationship between input signal and hex code	
Unused outputs	Are configured as "unused" (default value) and can be left open-circuited

4 System data AC500

4.1 Environmental conditions

Table 1: Process and supply voltages

Parameter	Value
24 V DC	
Voltage	24 V (-15 %, +20 %)
Protection against reverse polarity	Yes
100 V AC...240 V AC wide-range supply	
Voltage	100 V ... 240 V (-15 %, +10 %)
Frequency	50/60 Hz (-6 %, +4 %)
Allowed interruptions of power supply, according to EN 61131-2	
DC supply	Interruption < 10 ms, time between 2 interrup- tions > 1 s, PS2
AC supply	Interruption < 0.5 periods, time between 2 inter- ruptions > 1 s