

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Reference package for procurement and maintenance review

GE VERSAMAX

IC200CHS022E

COMPACT BOX-CLAMP I/O CARRIER

Used with the applicable VersaMax I/O carriers configuration.

REFERENCE PACKAGE

OFFICIAL DOCUMENT

Selected official manufacturer pages follow this cover.

Source: GE official manufacturer documentation



Carriers

VersaMax provides several types of snap-together I/O carriers and interposing terminals to provide maximum wiring flexibility, as well as module hot insertion and removal. VersaMax carriers support IEC box-style, spring-style, and barrier-style terminals and are also available as snap-on auxiliary terminal strips and interposing terminals that can be mounted separately and connected to a connector-style carrier by an I/O cable.


	IC200CHS022	IC200CHS025
Product Name	VersaMax Compact I/O Carrier, Local Box Clamp Connection Style	VersaMax Compact I/O Carrier, Local Spring Clamp Connection Style
Field Termination Type	Integrated	Integrated
Wiring Termination Style	Local Box	Local Spring
Orientation on Module on Base	Vertical	Vertical
Dimensions (W x H x D)	66.8 mm (2.63 in) x 163.5 mm (6.45 in) x 70 mm (2.75 in), not including the height of DIN Rail	66.8 mm (2.63 in) x 163.5 mm (6.45 in) x 70 mm (2.75 in), not including the height of DIN Rail
Cables	N/A	N/A

Configuration Guidelines

When configuring a VersaMax Modular the following guidelines should be considered:

1. All I/O modules require an I/O Carrier (IC200CHS001, 002, 003, 005, 022 or 025).
2. When an I/O Connector Carrier (IC200CHS003) is selected, a cable (IC200CBL6xx) and interposing remote base (IC200CHS011, 012, 014 or 015) are required.
3. When configuring a system, the power consumptions should be tracked to determine what power supply and how many power supplies may be required.
4. DIN rail clips should be used to secure the VersaMax modules (IC200ACC313).
5. A maximum of 8 carriers, any combination of I/O or communications, can be connected directly to either an NIU or CPU. (Power Supply Booster base is not counted as a carrier). CPUs and NIUs can be expanded beyond the 8 carriers using the Bus Transmitter Expansion (IC200ETM001) and up to 7 Expansion Receiver Modules (IC200ERM00x) for a total of 64 carrier modules.

For a multiple-rack expansion system, connect the cable from the expansion port on the Expansion Transmitter to the Expansion Receivers as shown below. If all the Expansion Receivers are the Isolated type (IC200ERM001), the maximum overall cable length is 750 meters. If the expansion bus includes any non-isolated Expansion Receivers (IC200ERM002), the maximum overall cable length is 15 meters.

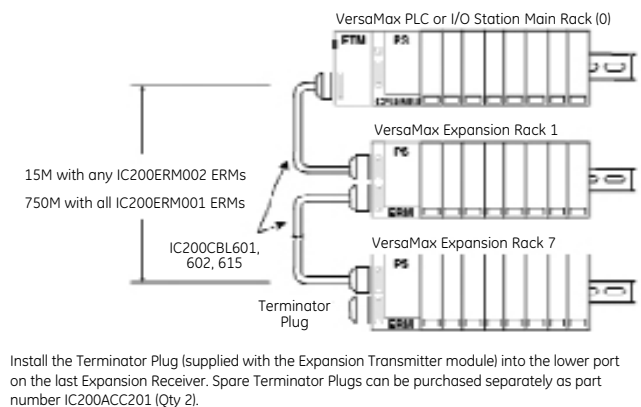

Examples of Typical Application

Configuration for Controller (Example application requiring (30) 24 VDC inputs and (10) Relay outputs AC power supply)

Power Supply Current Required (mA)	Qty	Part Number	Description
40 @ 5 V and 100 @ 3 V	1	IC200CPU001	VersaMax PLC CPU 32K Configurable Memory, 2 Ports RS-232 and RS-485
	1	IC200PWR101	VersaMax 120/240 VAC Power Supply (1.5 amps 5 V and 0.25 amps 3.3 V)
50 @ 5 V	1	IC200MDL650	VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points
490 @ 5 V	1	IC200MDL940	VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points
	2	IC200CHS022	VersaMax Compact I/O Carrier, Local Box Clamp Connection Style
	1	IC200ACC313	DIN rail clips (Qty 2) to secure modules on DIN rail
	1	BC646MPS101	Logic Developer - PLC Standard - w/Programming Cable
Total:		580 @ 5 V and 100 @ 3 V (820 mA remaining). 1500 mA available for 5 V and 3.3 V.	

Options to consider

	1	IC646MPH101	Logic Developer PDA Single License with Adapters. With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup — saving you time and increasing productivity.
	1	IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply
100 @ 5 V	1	IC200ACC003	EZ Program Store, CPU RS485 Port Update Device

Configuration for Controller (Application requiring 20K of Registers, (60) 24 VDC inputs, (15) AC Inputs, (12) AC Outputs and (20) Relay outputs also (16) Analog Inputs, (12) Isolated Analog Outputs and 24 VDC power supply. Also requires Profibus Slave connection)

Power Supply Current Required	Qty	Part Number	Description
80 @ 5 V and 650 @ 3 V	1	IC200CPU005	VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485
	3	IC200PWR002	24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.)
100 @ 5 V	2	IC200MDL650	VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points
110 @ 5 V	1	IC200MDL240	VersaMax Discrete Input Module, 120 VAC Positive Logic, 16 points
170 @ 5 V	2	IC200MDL331	VersaMax Discrete Output Module, 120 VAC 2.0 A per point Isolated, 8 points
980 @ 5 V	2	IC200MDL940	VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points
400 @ 5 V	2	IC200ALG262	VersaMax Analog Input Module, 15 Bit Differential Current, 8 Channel
10 @ 5 V and 115 @ 3 V	2	IC200ALG331	VersaMax Analog Output Module, 14 Bit Voltage/Current 1500 VAC Isolation, 8 Channel
	11	IC200CHS022	VersaMax Compact I/O Carrier, Local Box Clamp Connection Style
460 @ 5 V and 5 @ 3 V	1	IC200BEM002	PLC Network Communications Profibus-DP (Slave)
	1	IC200PWB001	VersaMax Power Supply Booster Carrier. Supplies power to all modules to the right of booster. Requires power supply.
	1	IC200CHS006	VersaMax I/O, Local Communications Carrier
44 @ 5 V	1	IC200ETM001	Bus Transmitter Expansion Module
70 @ 5 V and 20 @ 3 V	1	IC200ERM002	Expansion Receiver Module, Non-Isolated
	1	IC200CBL600	Cable Expansion Shielded Single Ended 1M
	1	IC200ACC313	DIN rail clips (Qty 2) to secure modules on DIN rail
	1	BC646MPS101	Logic Developer - PLC Standard - w/Programming Cable
Total:		2424 @ 5 V and 790 @ 3 V Required. 4500 mA available for 5 V and 3.3 V. Power Supply Booster required with extra Power Supply to meet power requirements.	

(continued on next page)

VersaMax

Options to consider

	1	IC646MPH101	Logic Developer PDA Single License with Adapters . With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup – saving you time and increasing productivity.
	1	IC690PWR024	24 VDC, 5 Amp Output Power and 120/230 VAC Input Power Power Supply
	1	IC754VSI06STD	QuickPanel View Intermediate 6 inch STN Touch DC
100 @ 5 V	1	IC200ACC003	EZ Program Store, CPU RS485 Port Update Device

Configuration for Controller Ethernet connectivity, (60) 24 VDC inputs, (20) Relay outputs, (16) Analog Inputs, (12) Thermocouples on a remote Ethernet drop, (12) Isolated Analog Outputs and 24 VDC power supply. Also requires Color TFT Operator Interface with Touch Screen.

Power Supply Current Required	Qty	Part Number	Description
160 @ 5 V and 650 @ 3 V	1	IC200CPUE05	VersaMax PLC CPU 128K Configurable User Memory, 2 Ports RS-232 and RS-485, 10 MBIT Ethernet Port. Supports SRTP and EGD.
	2	IC200PWR002	24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.)
	1	IC200PWB001	VersaMax Power Supply Booster Carrier. Supplies power to all modules to the right of booster. Requires power supply.
100 @ 5 V	2	IC200MDL650	VersaMax Discrete Input Module, 24 VDC Positive Logic, 32 points
980 @ 5 V	2	IC200MDL940	VersaMax Discrete Output Module, Relay 2.0 A per point Isolated Form A, 16 points
400 @ 5 V	2	IC200ALG262	VersaMax Analog Input Module, 15 Bit Differential Current, 8 Channel
10 @ 5 V and 115 @ 3 V	2	IC200ALG331	VersaMax Analog Output Module, 14 Bit Voltage/Current 1500 VAC Isolation, 8 Channel
	8	IC200CHS022	VersaMax Compact I/O Carrier, Local Box Clamp Connection Style
	2	IC200ACC313	DIN rail clips (Qty 2) to secure modules on DIN rail
	1	BC646MBT001	Logic Developer PLC Standard Edition and View for QuickPanel with 15 mos. of Proficy GlobalCare which is renewable on an annual basis.
	1	IC754VSI06STD	QuickPanel View Intermediate 6 inch STN Touch DC
Total:	1650 @ 5 V and 765 @ 3 V. 3000 mA available for 5 V and 3.3 V.		

Ethernet Remote Drop

175 @ 5 V and 425 @ 3 V	1	IC200ETM001	Bus Transmitter Expansion Module
	1	IC200PWR002	24 VDC Power Supply with Expanded 3.3 V (Logic side supply of 1.5 amps maximum. Up to 1.0 amp can be allocated for 3.3 V usage.)
250 @ 5 V and 250 @ 3 V	2	IC200ALG630	VersaMax Analog Input Module, 16 Bit Thermocouple, 7 Channel
	1	IC690ACC905	Encapsulated Thermistor Kit Qty 2
	2	IC200CHS022	VersaMax Compact I/O Carrier, Local Box Clamp Connection Style
	1	IC200ACC313	DIN rail clips (Qty 2) to secure modules on DIN rail
Total:	2424 @ 5 V and 790 @ 3 V Required. 4500 mA available for 5 V and 3.3 V. Power Supply Booster required with extra Power Supply to meet power requirements.		

Options to consider

	1	IC646MPH101	Logic Developer PDA Single License with Adapters. With Logic Developer PDA, you can monitor/change data, view diagnostics, force ON/OFF, and configure machine setup – saving you time and increasing productivity.
	1	IC690PWR124	24 VDC, 10 Amp Output Power and 120/230 VAC Input Power Power Supply
100 @ 5 V	1	IC200ACC003	EZ Program Store, CPU RS485 Port Update Device