MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Selected official pages for procurement and maintenance review

PRODUCT BRAND

Siemens

PRODUCT MODEL

6ES7288-5DT04-0AA0

SB DT04 Digital I/O Board. Relevant section pages: 835, 836, 837. Adjacent model text on shared pages is outside this product reference.

OFFICIAL SOURCE

S7-200 SMART System Manual; V2.5, 01/2020, A5E03822230-AI

Siemens original documentation and product reference

Historical Siemens V2.5 (01/2020) technical excerpt, not the latest edition or a complete installation guide. Only SB DT04 data apply; adjacent RTD tables are excluded. Verify the host CPU and delivered revision before use.

AMIKON PRODUCT SUPPORT

+86-18020776786 INFO@AMIKON.CN

AMIKONG.COM

Amikon Limited prepared this independent reference package. Selected manufacturer pages follow with their original content and pagination visible.

Legal information

Warning notice system

This manual contains notices you have to observe in order to ensure your personal safety, as well as to prevent damage to property. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to property damage have no safety alert symbol. These notices shown below are graded according to the degree of danger.

⚠ DANGER

indicates that death or severe personal injury **will** result if proper precautions are not taken.

⚠ WARNING

indicates that death or severe personal injury **may** result if proper precautions are not taken.

⚠ CAUTION

indicates that minor personal injury can result if proper precautions are not taken.

NOTICE

indicates that property damage can result if proper precautions are not taken.

If more than one degree of danger is present, the warning notice representing the highest degree of danger will be used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified Personnel

The product/system described in this documentation may be operated only by **personnel qualified** for the specific task in accordance with the relevant documentation, in particular its warning notices and safety instructions. Qualified personnel are those who, based on their training and experience, are capable of identifying risks and avoiding potential hazards when working with these products/systems.

Proper use of Siemens products

Note the following:

⚠ WARNING

Siemens products may only be used for the applications described in the catalog and in the relevant technical documentation. If products and components from other manufacturers are used, these must be recommended or approved by Siemens. Proper transport, storage, installation, assembly, commissioning, operation and maintenance are required to ensure that the products operate safely and without any problems. The permissible ambient conditions must be complied with. The information in the relevant documentation must be observed.

Trademarks

All names identified by ® are registered trademarks of Siemens AG. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of Liability

We have reviewed the contents of this publication to ensure consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. However, the information in this publication is reviewed regularly and any necessary corrections are included in subsequent editions.

Siemens AG
Division Digital Factory
Postfach 48 48
90026 NÜRNBERG
GERMANY

A5E03822230-AI
℗ 12/2019 Subject to change

Copyright © Siemens AG 2020.
All rights reserved

Table A- 135 Connector pin locations for EM AR02 RTD 2 x 16 bit (6ES7288-3AR02-0AA0)

Pin	X10 (gold)	X11 (gold)
1	L+ / 24 V DC	No connection
2	M / 24 V DC	No connection
3	Functional Earth	No connection
4	AI 0 M+/RTD	AI 1 M+/RTD
5	AI 0 M-/RTD	AI 1 M-/RTD
6	AI 0 I+/RTD	AI 1 I+/RTD
7	AI 0 I-/RTD	AI 1 I-/RTD

Table A- 136 Connector pin locations for EM AR04 RTD 4 x 16 bit (6ES7288-3AR04-0AA0)

Pin	X10 (gold)	X11 (gold)	X12 (gold)	X13 (gold)
1	L+ / 24 V DC	No connection	No connection	No connection
2	M / 24 V DC	No connection	No connection	No connection
3	Functional Earth	No connection	No connection	No connection
4	AI 0 M+/RTD	AI 1 M+/RTD	AI 2 M+/RTD	AI 3 M+/RTD
5	AI 0 M-/RTD	AI 1 M-/RTD	AI 2 M-/RTD	AI 3 M-/RTD
6	AI 0 I+/RTD	AI 1 I+/RTD	AI 2 I+.RTD	AI 3 I+/RTD
7	AI 0 I-/RTD	AI 1 I-/RTD	AI 2 I-/RTD	AI 3 I/-/RTD

A.6 Digital signal boards

A.6.1 SB DT04 digital input/output specifications

Table A- 137 General specifications

Technical data	SB Digital 2 x Inputs / 2 x Digital Outputs (DT04)
Article number	6ES7288-5DT04-0AA0
Dimensions W x H x D (mm)	35 x 52.2 x 16
Weight	18.1 grams
Power dissipation	1.0 W
Current consumption (5 V DC)	50 mA
Current consumption (24 V DC)	4 mA / Input used

Table A- 138 Digital inputs

Technical data	SB Digital 2 x Inputs / 2 x Digital Outputs (DT04)
Number of inputs	2
Type	Sink (IEC Type 1 sink)
Rated voltage	24 V DC at 4 mA, nominal
Continuous permissible voltage	30 V DC max.
Surge voltage	35 V DC for 0.5 sec.
Logic 1 signal (min.)	15 V DC at 2.5 mA
Logic 0 signal (max.)	5 V DC at 1 mA
Isolation (field side to logic)	500 V AC for 1 minute
Isolation groups	1
Filter times	Individually selectable on each channel: µs: 0.2, 0.4, 0.8, 1.6, 3.2, 6.4, 12.8 ms: 0.2, 0.4, 0.8, 1.6, 3.2, 6.4, 12.8
Number of inputs on simultaneously	2
Cable length (max.), in meters	Shielded: 500 m normal inputs Unshielded: 300 m normal inputs

Table A- 139 Digital outputs

Technical data	SB Digital 2 x Inputs / 2 x Digital Outputs (DT04)
Number of outputs	2
Output type	Solid state - MOSFET (sourcing)
Voltage range	20.4 to 28.8 V DC
Logic 1 signal at max. current	20 V DC min.
Logic 0 signal at max. current	0.1 V DC max.
Rated current per point (max.)	0.5 A
Rated current per common (max.)	1 A
Lamp load	5 W
On state contact resistance	0.6 Ω max.
Leakage current per point	10 µA max.
Surge current	5 A for 100 ms max.
Overload protection	No
Isolation (field side to logic)	500 V AC for 1 minute
Isolation groups	1
Inductive clamp voltage	L+ minus 48 V, 1 W dissipation
Switching delay	2 µs max. off to on 10 µs max. on to off
Output behavior in STOP	Last value or substitute value (default value 0)

Technical data	SB Digital 2 x Inputs / 2 x Digital Outputs (DT04)
Number of outputs on simultaneously	2
Cable length (max.), in meters	Shielded: 500 m normal inputs Unshielded: 150 m normal inputs

Table A- 140 Wiring diagram for the SB DT04 2 Digital Input/2 Digital Output (6ES7288-5DT04-0AA0)

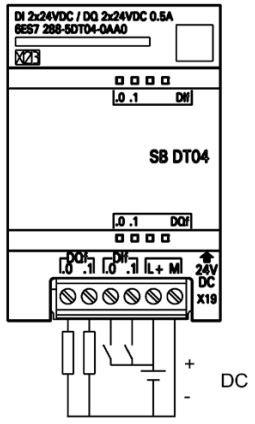
SB DT04 2 Digital Input/2 Digital Output (6ES7288-5DT04-0AA0)	
	

Table A- 141 Connector pin locations for SB DT04 2 Digital Input/2 Digital Output (6ES7288-5DT04-0AA0)

Pin	X19
1	DQ f.0
2	DQ f.1
3	DI f.0
4	DI f.1
5	L+ / 24 V DC
6	M / 24 V DC