

Field circuit interfaces SDCS-BAB-F01 and SDCS-BAB-F02 (H1 ... H4)

The OnBoard field exciter is located internally. The firing pulses are synchronized using the mains circuit L1, L2, L3 and the SDCS-CON-H01. The pulses are amplified on the SDCS-PIN-H01.

The hardware structure is a three phase half controlled bridge supplied directly from the mains U1, V1, W1 via fuses F100, F101, F102.

If the OnBoard field exciter is not needed it can be deselected in the firmware.

The field circuit interface consists of:

- Firing the three phase half controlled field bridge.
- Measuring the field current on the DC side. The scaling is automatically selected using the rated motor field current.
- The snubber circuit is shared with the armature bridge.
- Fuses F100, F101, F102 are used for cable and motor field winding protection.
- Size H3 and H4 converters for 600 V are always delivered without OnBoard field exciter.
- Size H5 converters do not use the field circuit interface on the SDCS-PIN-H01

Ratings OnBoard field exciter



AC voltage range	110 ... 500 V (IEC) / 525 V (UL)
AC insulation voltage	600 V
Frequency	50 Hz / 60 Hz
AC input current	< Field current

Cables



Size	H1	H1	H2	H3	H4
DC output current	6 A / 12 A	12 A	18 A	25 A	30 A
max. cross sectional area	6 mm ² AWG 10	6 mm ² AWG 10	6 mm ² AWG 10	6 mm ² AWG 10	6 mm ² AWG 10
min. cross sectional area	1 mm ² AWG 16	2.5 mm ² AWG 13	4 mm ² AWG 11	6 mm ² AWG 10	6 mm ² AWG 10

Layout

SDCS-BAB-F01 for module sizes H1 and H2:

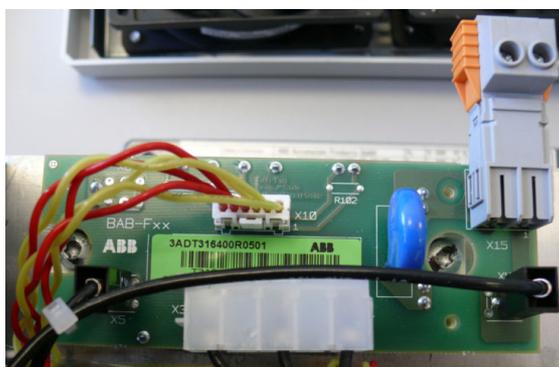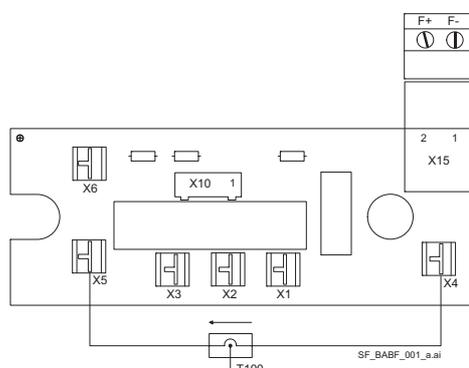

SDCS-BAB-F02 for module sizes H3 and H4:

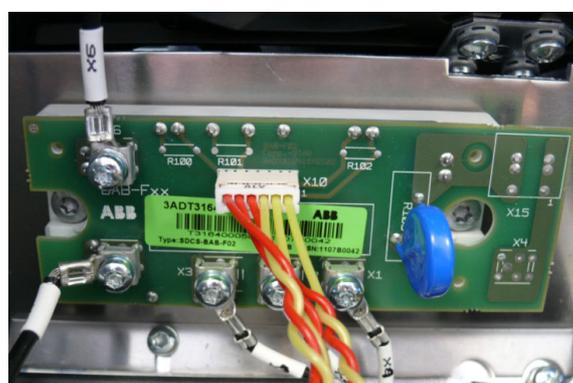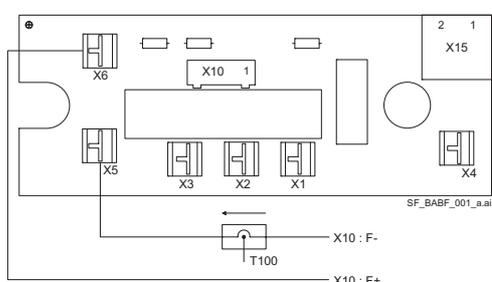

Location

The SDCS-BAB-F0x is located between the power part and the control board SDCS-CON-H01.

Functions


The SDCS-BAB-F0x is a three-phase half-controlled field exciter. The field exciter is directly supplied from the armature mains. Its firing pulses and snubbers are located on the SDCS-PIN-H01. For connection details see next pages.

Size	Converter type	Used type	Used fuses	T100 threads	I_F [A]
H1	DCS880-S01-0020 ... DCS880-S02-0025	SDCS-BAB-F01	F100 ... F102 on SDCS-PIN-H01 KTK 25 = 25 A	4 ①	0.3 ... 6
H1	DCS880-S01-0045 ... DCS880-S02-0100	SDCS-BAB-F01	F100 ... F102 on SDCS-PIN-H01 KTK 25 = 25 A	3 ①	1 ... 12
H2	DCS880-S01-0135 ... DCS880-S02-0300	SDCS-BAB-F01	F100 ... F102 on SDCS-PIN-H01 KTK 25 = 25 A	2 ①	1 ... 18
H3	DCS880-S01-0315 ... DCS880-S02-0520	SDCS-BAB-F02	F100 ... F102 on SDCS-PIN-H01 KTK 25 = 25 A	1 ①	2 ... 25
H4	DCS880-S01-0610 ... DCS880-S02-1000	SDCS-BAB-F02	F401 ... F403 in drive KTK 30 = 30 A	1 ①	2 ... 30

① Number of threads through the hole in the T100 (e.g. 3 threads equal 2 loops).

Circuit diagram

Typical armature circuit diagram for module sizes H1 and H2 using SDCS-PIN-H01 and SDCS-BAB-F01:

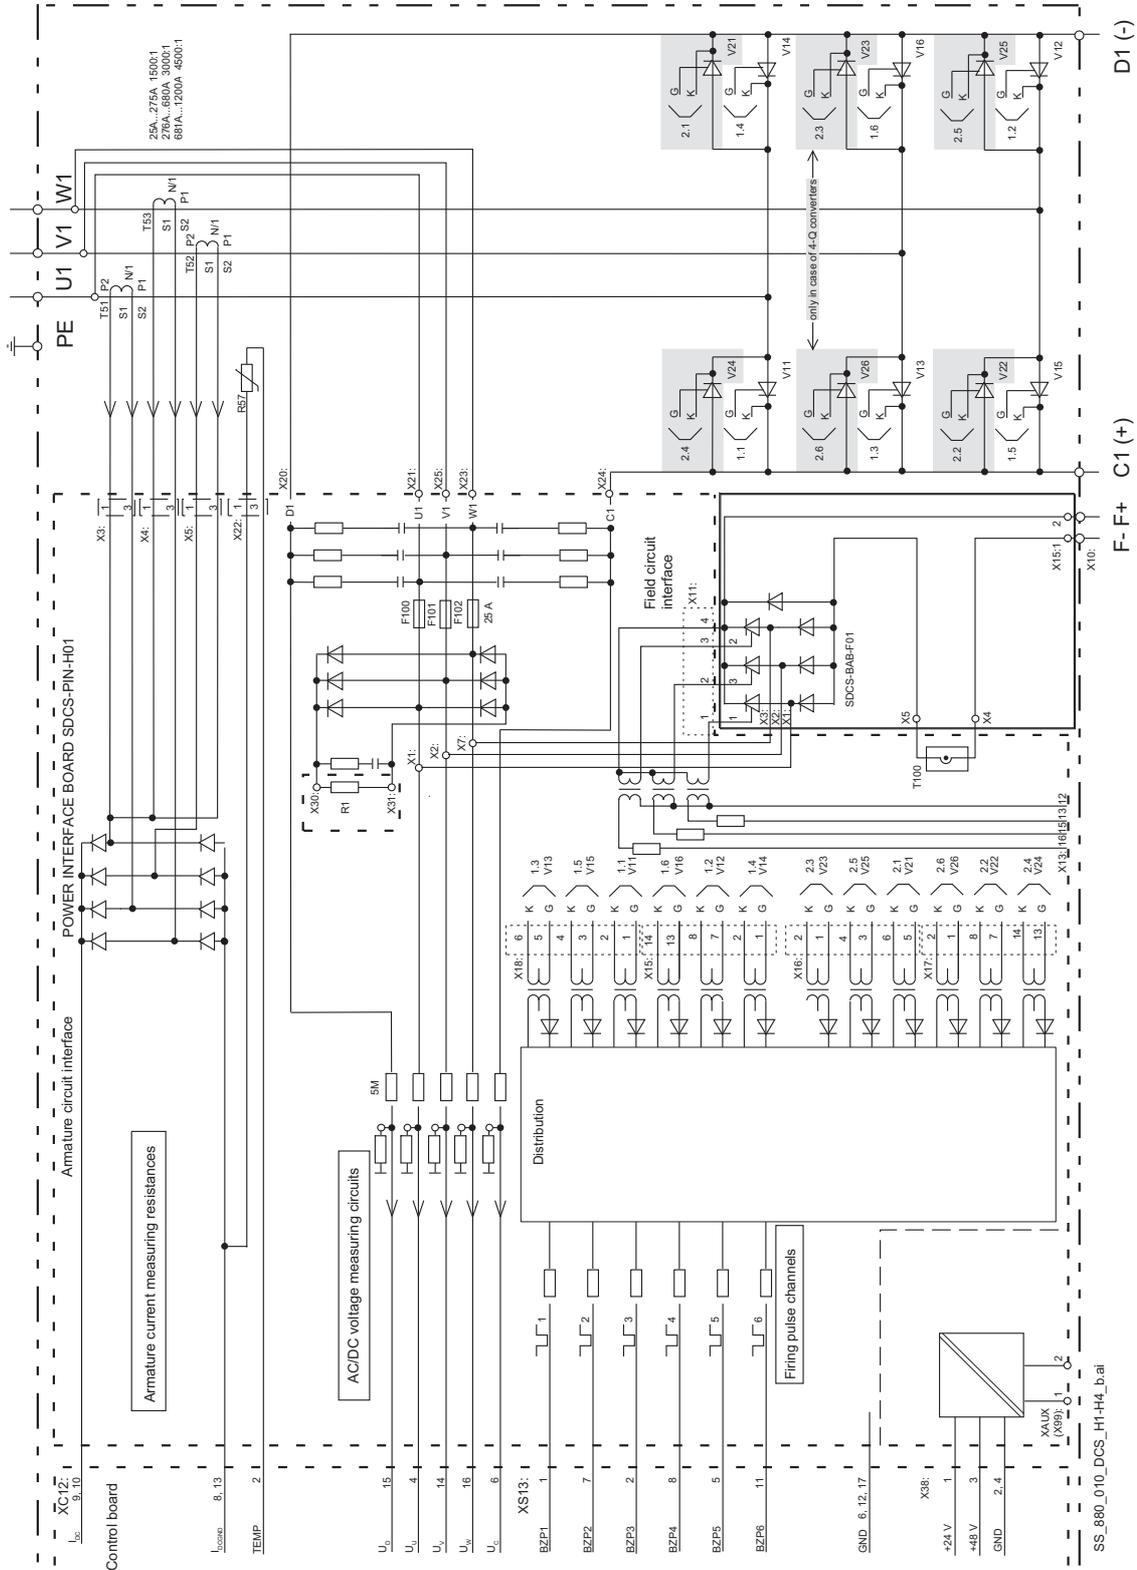

Typical armature circuit diagram for module sizes H3 and H4 using SDCS-PIN-H01 and SDCS-BAB-F02:

