


# cPCI-6930 Series

## 6U CompactPCI 10-core 22nm Intel® Xeon® Processor Blade

### Features

- Up to 10-core Intel® Xeon processor 1.8GHz and 25MB LLC
- Up to 192GB DDR3 ECC registerd memory by RDIMMs
- Two USB 3.0, four GbE ports on front panel
- Onboard SATA NAND Flash and optional CF, CFast socket
- Optional SAS 6Gb/s port for 2.5" drive onboard

### CompactPCI®

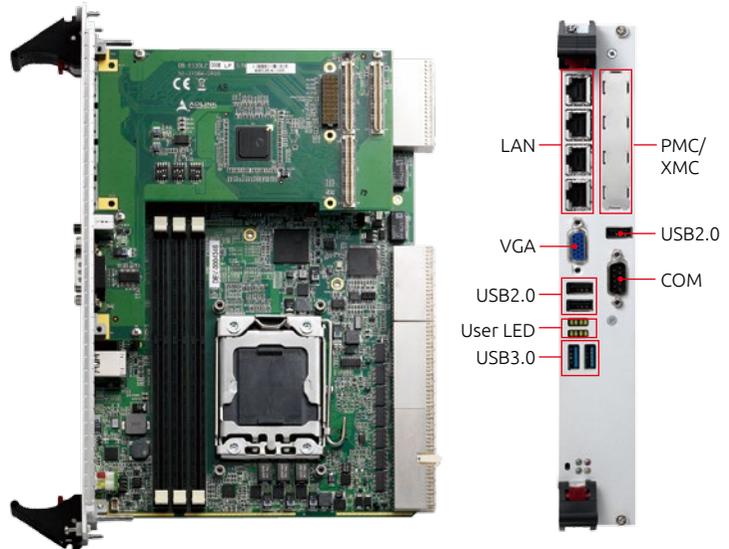

### Specifications

#### Processor & System

##### CPU

LGA1356 ten-core Intel® Xeon® E5-2448L v2 Processor, 1.8GHz, 25MB LLC, TDP 70W

LGA1356 eight-core Intel® Xeon® E5-2428L v2 Processor, 1.8GHz, 20MB LLC, TDP 60W

LGA1356 six-core Intel® Xeon® E5-2418L v2 Processor, 2.0GHz, 15MB LLC, TDP 50W

LGA1356 eight-core Intel® Xeon® E5-2448L Processor 1.8GHz, 20MB LLC, TDP 70W

LGA1356 six-core Intel® Xeon® E5-2428L Processor 1.8GHz, 15MB LLC, TDP 60W

LGA1356 quad-core Intel® Xeon® E5-2418L Processor 2.0GHz, 10MB LLC, TDP 50W

Passive heatsink

##### Chipset

Intel® C600 PCH

##### Memory

Three channel DDR3-1600 ECC register SDRAM with three RDIMM slots, up to 192GB capacity (dependent on availability of memory modules)

##### BIOS

AMI® EFI BIOS, 64Mbit SPI flash memory

##### CompactPCI Bus

PCI 64-bit, 66MHz, 3.3V or 5V universal V(I/O)

Supports operation in system slot as master or in peripheral slot as stand-alone blade without connectivity to CompactPCI® bus (Satellite mode)

##### PIGMIG Standards

PICMG 2.0 CompactPCI R3.0

PICMG 2.1 Hot Swap R2.0

PICMG 2.9 System Management R1.0

PICMG 2.16 Packet Switch Backplane R1.0

#### Connectivity

##### PMC/XMC

One PCI 32/64-bit, 33/66/133MHz PMC site or PCI-Express x8 XMC site

##### Ethernet

One Intel® 82580 Gigabit Ethernet controller for four 10/100/1000BASE-T ports

Two Intel® 82574L Gigabit Ethernet controllers for two 10/100/1000BASE-T ports to J3 for PICMG 2.16

Two additional 10/100/1000BASE-T ports from Intel® 82576EB on RTM (cPCI-R6100 or cPCI-R6110)

##### Graphics

SMI SM750 2D graphics chip

16MB embedded 32-bit DDR memory at 166MHz

Two analog RGB signals to front and rear for VGA interfaces with dual display support

Up to 1920x1440 resolution

##### USB

Two USB 3.0 and three USB 2.0 ports on front panel

Six USB 2.0 ports routed to rear

##### PS/2

PS/2 keyboard/mouse port to rear

##### Serial Port

Up to three 16C550 compatible serial ports

One DB-9 RS-232 port on front panel

Two serial ports routed to rear

##### Audio

High Definition Audio signals routed to rear

## Specifications

### • Storage

#### Processor Blade

4GB SATA NAND flash onboard

One SATA 6 Gb/s direct connector for 2.5" onboard drive (removable)

Optional CF or CFast socket (shares space with SATA direct connector)

Optional SAS direct connector for 2.5" onboard drive (shares space with SATA direct connector; not available concurrently with COM, USB, PMC/XMC site on layer 2)

#### RTM\*

Up to three SATA ports

CF (x1) and SD (x1) sockets

Eight SAS ports supporting hardware RAID via two mini-SAS x4 connectors (LSISAS1068E)

cPCI-R6200, contact ADLINK for assistance

\*Available interfaces dependent on RTM model selected

### • Operating System

#### OS

Microsoft Windows 7 32/64-bit

Microsoft Windows Server 2008 64-bit

Red Hat Enterprise Linux 6.1

Fedora 15

Wind River VxWorks 6.9 (Please contact ADLINK for other OS support)

### • Miscellaneous

#### LED

Power, WDT, Hard Disk, Hotswap and Port 80 User LEDs

#### Battery

Coin cell lithium battery onboard for RTC CMOS RAM

#### TPM

Infineon SLB 9635 TT1.2 (optional, support upon request)

#### Watchdog Timer

System Reset and NMI, with Programmable Interval, 1-65535 seconds or minutes

#### Hardware Monitor

Monitors CPU temperature, system temperature, Vcore and DC voltages

### • Mechanical & Environmental

#### Form Factor

6U 4/8HP (single/dual slot) CompactPCI

233.33mm x 160mm (LxW)

#### Operating Temperature

0°C to +55°C with forced air flow

#### Storage Temperature

-40°C to +85°C

#### RH Humidity

95% non-condensing

#### Shock

15G peak-to-peak, 11ms duration, non-operating

#### Vibration

2 Grms random vibration, 5-500Hz, each axis, operating

#### Power Consumption

8-C Xeon E5-2448L processor, 12GB DDR3-1600 under Windows 7 with 100% CPU usage

19.6A@5V, 4.6A@3.3V, total 113.2W when Turbo boost and HT enabled;

16.7A@5V, 4.4A@3.3V, total 98W when Turbo boost and HT disabled

#### Weight

Net weight 1087.6g with heatsink

#### EMI/EMC

EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3

## I/O Table

		GbE	USB 2.0	USB 3.0	COM	DVI	VGA	PMC/ XMC	SATA	CFast	CF	Mic-in	Line- out	PS/2 KB/MS	SD	SAS
<b>SBC</b>																
cPCI-6930 (4HP)	Faceplate	4	2	2			1									
	Onboard															
cPCI-6930D (8HP)	Faceplate	4	3	2	1		1	1								
	Onboard								1 <sup>(1)</sup>	1 <sup>(1)</sup>	1 <sup>(1)</sup>					1 <sup>(1)</sup>
<b>RTM</b>																
cPCI-R6002	Faceplate	2	2		1	1 (VGA signal only)										
	Onboard								2(7-pin)							
cPCI-R6002D	Faceplate	2	4			1 (VGA signal only)						1	1	1		
	Onboard								3 (2x 7-pin+1x 2.5" sapce) <sup>(3)</sup>							
cPCI-R6100	Faceplate	4	4		1 (RJ-45)		1							1		
	Onboard								2 (7-pin)		1				1	
cPCI-R6110	Faceplate	2	4											1		
	Onboard								3 (2x 7-pin+1x 2.5" space) <sup>(3)</sup>							
cPCI-R6120	Faceplate	2	4											1		
	Onboard								2 (2.5" SATA drive onboard)							
cPCI-R6500	Faceplate	2	-			DVI-I DVI-D										
	Onboard								3(7-pin)							
cPCI-R6500D	Faceplate	2	1			DVI-I DVI-D										
	Onboard		1(10-pin header)		1 (Full, 10-pin header) 1(TX/RX, 10-pin header)				3 (2x 7-pin+1x 2.5" space) <sup>(5)</sup>			1 (10-pin header)		1(10-pin header)		
cPCI-R6501D	Faceplate	2	1		1 (DB-9)	2 (DVI-I+DVI-D)										
	Onboard		1 (10-pin)		1 <sup>(2)</sup> (10-pin)				3 <sup>(5)</sup> (7-pin)			1 (10-pin)		1 (10-pin)		
cPCI-R65N0	Faceplate	2	1		1	2								1		
	Onboard		1		1 (Tx/Rx)				3 (7-pin)			1 (10-pin)				


(1) Removable adapter design. SATA adapter by default, can be replaced with CF, CFast or SAS adapter.

(2) Tx, Rx signals only.


(3) Two 7-pin signal connectors onboard for external HDDs and one direct connector for onboard 2.5" SATA drive. SATA direct connector can be replaced by CompactFlash adapter (DB-6920CF) for CF slot.

(4) Converted from USB.


(5) Space is reserved onboard for one 2.5" SATA drive.

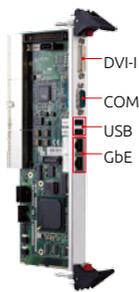


cPCI-R6002

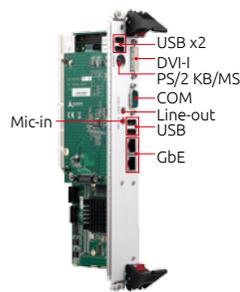


cPCI-R6002D

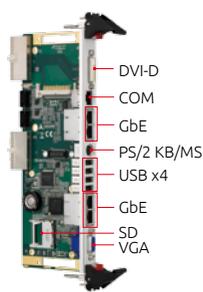

cPCI-R6100

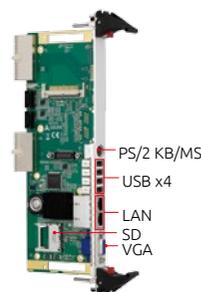

cPCI-R6110

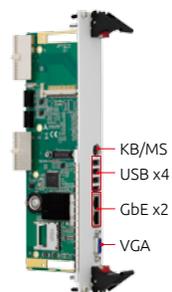

cPCI-R6120