

PACSystems* RX7i

IC698CPE010/CPE020

Central Processing Unit

GFK-2244AG

February 2012


The RX7i CPUs are programmed and configured by the programming software to perform real time control of machines, processes, and material handling systems. The CPU communicates with I/O and smart option modules over a rack-mounted backplane using the VME64 Standard format. It communicates with the programmer and HMI devices via the embedded Ethernet ports or a serial port using SNP Slave protocol.

CPE010: 300MHz Celeron microprocessor

CPE020: 700MHz Pentium III microprocessor

Features

- Contains 10 Mbytes of battery-backed user memory and 10 Mbytes of non-volatile flash user memory.
- Provides access to bulk memory via reference table %W.
- Configurable data and program memory.
- Programming in Ladder Diagram, C, Structured Text, and Function Block Diagram.
- Supports auto-located Symbolic Variables that can use any amount of user memory.
- Reference table sizes include 32Kbits for discrete %I and %Q and up to 32K words each for analog %AI and %AQ.
- Supports Series 90-70 discrete and analog I/O, communications, and other modules. For a list of modules supported, refer to the *PACSystems RX7i Installation Manual*, GFK-2223.
- Supports all VME modules supported by Series 90-70.
- Supports RX7i data monitoring over the web. Allows a combined total of up to 16 web server and FTP connections.
- Supports up to 512 program blocks. Maximum size for a block is 128KB.
- Test Edit mode allows you to easily test modifications to a running program.
- Bit-in-word referencing.
- Battery-backed calendar clock.
- In-system upgradeable firmware.
- Three isolated serial ports: an RS-485 serial port, an RS-232 serial port, and an RS-232 Ethernet station manager serial port.
- The embedded Ethernet interface provides:
 - Data exchange using Ethernet Global Data (EGD)
 - TCP/IP communication services using SRTP
 - Support for SRTP Channels, Modbus/TCP Server, and Modbus/TCP Client
 - Full programming and configuration services
 - Comprehensive station management and diagnostic tools
 - Two full-duplex 10BaseT/100BaseT/TX (RJ-45 Connector) ports with an internal network switch providing auto-negotiated network speed, duplex mode, and crossover detection.
 - User-configurable Redundant IP address
 - Time synchronization to SNTP time server on Ethernet network (when used with Release 5.00 or later CPU module).

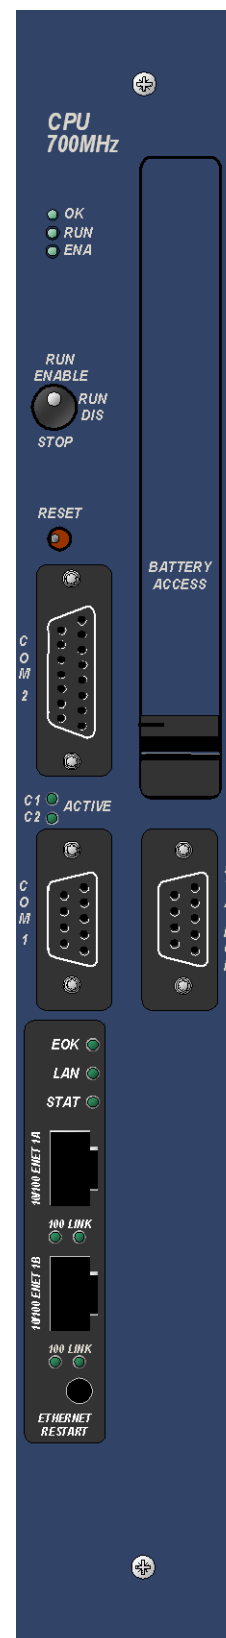

* indicates a trademark of GE Intelligent Platforms, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. All rights reserved.

Specifications

For environmental specifications and compliance to standards (for example, FCC or European Union Directives), refer to Appendix A of the *PACSystems RX7i Installation Manual*, GFK-2223.

Battery Memory retention	For details on battery operation, refer to the applicable battery module datasheet (page 25).
Program storage	Up to 10 Mbytes of battery-backed RAM 10 Mbytes of non-volatile flash user memory
Power requirements CPE010 CPE020	+5 VDC: 3.2 Amps nominal +12 VDC: 0.042 Amps nominal -12 VDC: 0.008 Amps nominal +5 VDC: 4.5 Amps nominal +12 VDC: 0.042 Amps nominal -12 VDC: 0.008 Amps nominal
Operating temperature	CPE010: 0 to 50°C (32°F to 122°F) 0 to 60°C (32°F to 140°F) with fan tray CPE020: 0 to 60°C (32°F to 140°F) with fan tray, required
Floating point	Yes
Boolean execution speed, typical CPE010 CPE020	0.33ms per 1000 Boolean contacts/coils 0.14ms per 1000 Boolean contacts/coils
Time of Day Clock accuracy	Maximum of 9 seconds per day
Elapsed Time Clock (internal timing) accuracy	0.01% maximum
Embedded communications	RS-232, RS-485, Ethernet interface
Ethernet Ports	Embedded auto-sensing 10/100 Mbps half/full duplex Ethernet interface
Serial protocols supported	Modbus RTU Slave, SNP, Serial I/O
VME Compatibility	System designed to support the VME64 standard ANSI/VITA 1
Program blocks	Up to 512 program blocks. Maximum size for a block is 128KB.
Memory	%I and %Q: 32Kbits for discrete %AI and %AQ: configurable up to 32Kwords %W: configurable up the maximum available user RAM Symbolic: configurable up to 10Mbytes
<i>Ethernet Interface Specifications</i>	
Web-based data monitoring	Up to 16 web server and FTP connections (combined)
Ethernet data rate	10Mb/sec and 100Mb/sec
Physical interface	10BaseT RJ45
WinLoader support	Yes
Number of EGD configuration-based pages	255
Time synchronization	SNTP
Selective consumption of EGD	Yes
Load EGD configuration from CPU to programmer	Yes
Remote Station Manager over UDP	Yes
Local Station Manager (RS-232)	Dedicated RS-232 port
Configurable Advanced User Parameters	Yes