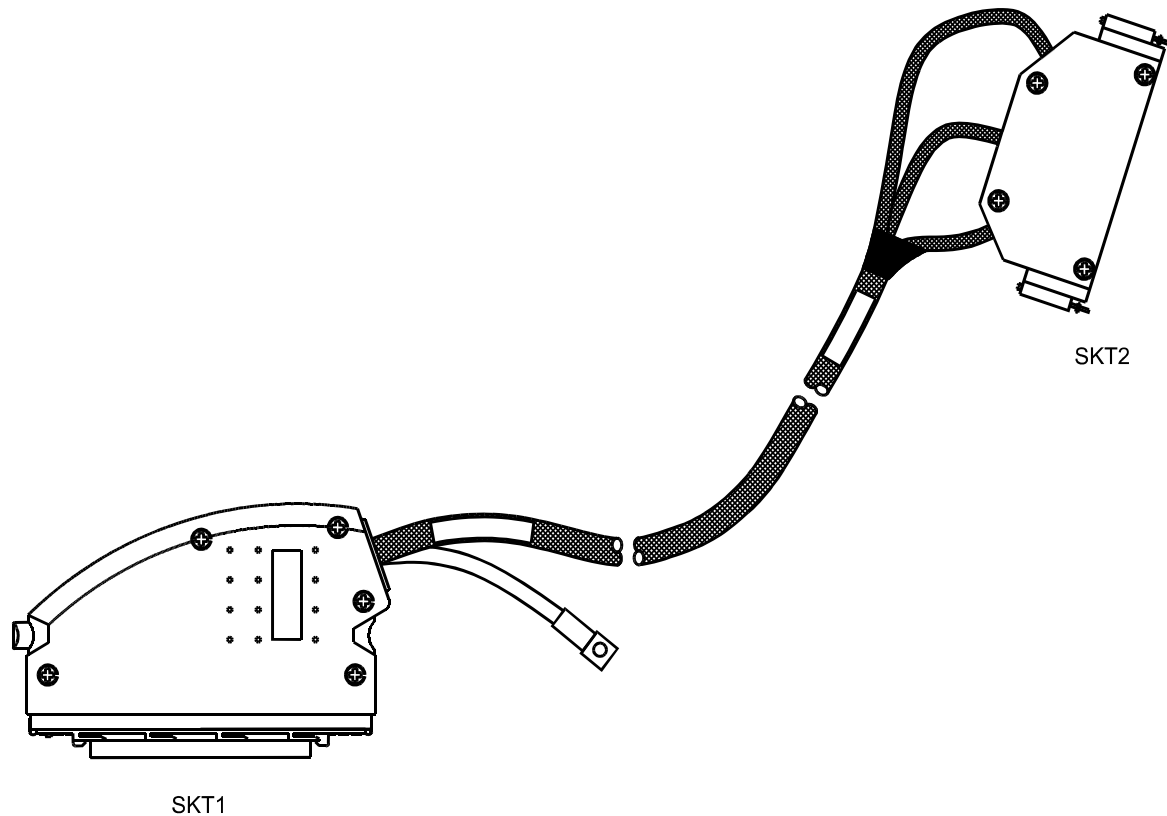


## 8. Communications Cable Type TC-308-0X

This type of Communications Cable is shown in Figure 8 below.



**Figure 8 Communications Cable Type TC-308-0X**

This type of Trusted Communications Cable is designed to provide I/O connection between a faulty Trusted Digital Output module (40 Channel only) and the I/O module occupying the SmartSlot position in a Trusted Controller or Expander Chassis.

The SmartSlot end of the cable (SKT1) is fitted with a 96-way type 'C' connector housed in a single-width hood. The hood is fitted with an earth braid. The faulty I/O module end is fitted with a 96-way type 'R' connector housed in a special-to-type plastic hood.

The cable assembly consists of either:

- 56-way LSZH wire harnesses shrouded in Megamide Sleeving (TC-308-02), or
- 56-way UL Certified wire harnesses shrouded in Megamide Sleeving (TC-308-03)

The ends of the sheathing are covered in heatshrink sleeving and heated to help prevent fraying.