

IEPE Accelerometer Series

Datasheet

Cordant™

124M2609 Rev. H

Description

This series of Integrated Electronics Piezo-Electric (IEPE) accelerometers are optimized for obtaining high quality vibration signals in harsh industrial environments. Their piezo sensing elements provide exceptional dynamic range, frequency range and linearity, while their integrated amplifiers boost the signal, making them relatively immune to electrical noise.

They require an industry standard constant-current power supply, and provide an output voltage proportional to the acceleration signal. So they can interface to a wide variety of condition monitoring systems.

Within the series are options for 100 or 500 mV/g sensitivity, top-exit or side-exit connector, and several hazardous-area certification levels.

Features

- Rugged stainless design, corrosion resistant
- Hermetic seal, case isolated
- ESD protection
- Reverse wiring protection
- EMI / RFI shielded
- Hazardous area certifications

Benefits

- Able to fit in small spaces
- Light weight for walk around programs
- Cross wiring does not harm sensor
- Prevents ground loops in permanent mount applications
- Can be hosed down or submersed with proper connector
- Can be used in applicable certified hazardous areas



Compliance

- See individual accelerometers for compliance.

Accelerometers in the Series

Part Number	Cable exit	Sensitivity	Accel range	Frequency Range (3dB)	Haz-area rating
AM3100T2-Z2	Top exit sensor	100 mV/g	80 g	0.4-14,000 Hz	Zone 2 rated
AS3100S2-Z2	Side exit sensor	100 mV/g	80 g	0.5-10,000 Hz	Zone 2 rated
AP3500T2-Z1	Top exit sensor	500 mV/g	10 g	0.2-10,000 Hz	Zone 1 rated
AP3500S2-Z1	Side exit sensor	500 mV/g	10 g	0.2-14,000 Hz	Zone 1 rated
AM3100T2-Z0	Top exit sensor	100 mV/g	80 g	0.4-14,000 Hz	Zone 0 rated
AS3100S2-Z0	Side exit sensor	100 mV/g	80 g	0.7-10,000 Hz	Zone 0 rated
181M6049	Top exit sensor	100 mV/g	60 g	0.5-12,000 Hz	Zone 0 rated

AM3100T2-Z2

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 0.7-9,000 Hz ± 3 dB: 0.4-14,000 Hz
Resonant frequency	30 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-55°C : -20% +120°C : +10%

Electrical

Voltage source	18-30 Vdc
Current regulating diode	2-10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	500 μ g
Spectral electrical noise @ 10 Hz	7 μ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	4 μ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	2 μ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 Ω
Bias output voltage	12 Vdc
Grounding	case isolated, internally shielded

Environmental

Temperature range	-55°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.0002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
Weight	62 grams
Case material	316L Stainless Steel
Mounting	¼-28 UNF tapped hole
Connector	Top exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

Compliance and Certifications

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.


European Community Directives

ATEX Directive 2014/34/EU
EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Standards

EN 61326-1
EN 60079-0
EN 60079-15


Hazardous Area Approvals

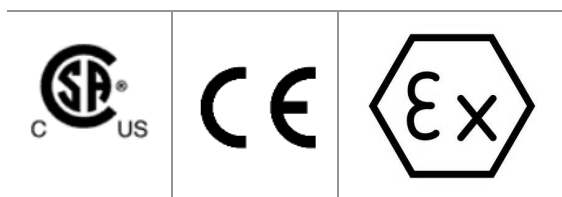

CSA/NRTL/C

Class I, Div 2, Groups A, B, C, D
Class I, Zone 2, AEx/Ex nA IIC T4
Install per drawing 117M2767

Atex/IECEx

 II 3G Ex nA nC IIC T4 Gc

AS3100S2-Z2

Specifications

Dynamic

Sensitivity, $\pm 5\%$ @25°C	100 mV/g
Acceleration range	80 g peak
Amplitude nonlinearity	1%
Frequency response	$\pm 10\%$: 1.0–5,000 Hz ± 3 dB: 0.5–10,000 Hz
Resonant frequency	22 kHz
Transverse sensitivity, max	$\pm 5\%$ of axial
Temperature response	-55°C: -20% +120°C: +10%

Electrical

Voltage source	18–30 Vdc
Current regulating diode	2–10 mA
Broadband electrical noise @ 2.5 Hz to 25 kHz	700 μ g
Spectral electrical noise @ 10 Hz	10 μ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 100 Hz	5 μ g/ $\sqrt{\text{Hz}}$
Spectral electrical noise @ 1000 Hz	5 μ g/ $\sqrt{\text{Hz}}$
Output Impedance, max	100 Ω
Bias output voltage	12 Vdc
Grounding	case isolated, internally shielded

Environmental

Temperature range	-55°C to 120°C
Vibration limit	500 g peak
Shock limit	5,000 g peak
Electromagnetic sensitivity, equiv g, max	70 μ g/gauss
Sealing	Hermetic
Base strain sensitivity, max	0.002 g/ μ strain

Physical

Sensing element design	PZT ceramic / shear
Weight	145 grams
Case material	316L Stainless Steel
Mounting	1/4-28 UNF tapped hole
Connector	Side exit, 2-pin, MIL-C-5015 style
Recommended cabling	Shielded, twisted pair, no longer than 100 feet

Connections

Connector Pin	Function
Shell	ground
A	power/signal
B	common



Frequency response and spectral noise values are typical.

Compliance and Certifications

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



European Community Directives

EMC Directive 2014/30/EU
LV Directive 2014/35/EU
Reach Directive 1907/2006/EC
ROHS Directive 2011/65/EU

Hazardous Area Approvals

CSA/NRTL/C

Class I, Div 2, Groups A, B, C, D
Class I, Zone 2: AEx/Ex nA IIC T4
Install per drawing 117M2767