


CPU CP1486

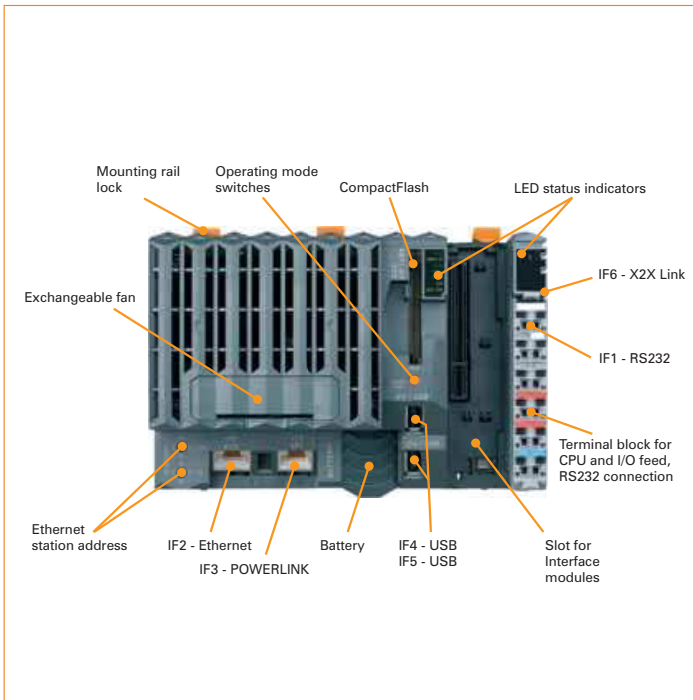

The CP1486 is a high-performance CPU for the X20 System. This CPU can be used anywhere from high-end applications in machine manufacturing to demanding tasks in process control.

Ethernet and USB are onboard. In addition, the CPU has a POWERLINK V1/V2 connection for real-time communication. The only differences from the CP3486 are that the CP1486 only has one slot for interface modules and a smaller width.

- Intel Celeron 650 Performance with additional I/O processor
- Ethernet, POWERLINK V1/V2 and USB onboard
- 1 slot for modular interface expansion
- Compact Flash as removable application memory
- Fan can be exchanged from the outside, tool-free
- Extremely compact

ETHERNET 
POWERLINK



Short description	X20CP1486
System module	CPU
Processor	Celeron 650
Interfaces	1x RS232, 1x Ethernet, 1x POWERLINK V1/V2, 2x USB, 1x X2X Link
Controller	X20CP1486
Fastest task class cycle time	200 µs
Typical instruction cycle time	0.01 µs
L1 cache for data and program code	2x 16 KB
L2 cache	256 KB
Standard memory	
Working memory (SDRAM)	64 MB SDRAM
User RAM (SRAM)	1 MB SRAM
Remanent variables	256 KB
FPU	Yes
Integrated I/O processor	Processes I/O data points in the background
Data buffering	
Lithium battery	At least 3 years
Battery monitoring	Yes
CompactFlash slot	1
Real-time clock	Nonvolatile memory, resolution 1 second
Modular interface slots	1

Interfaces	X20CP1486
Interface IF1	
Type	RS232
Design	Contact via 12-pin terminal block TB12
Maximum transfer rate	115.2 kBit/s
Interface IF2	
Type	Ethernet
Design	Shielded RJ45 port
Transfer rate	10/100 MBit/s
Cable length	Max. 100 m between two stations (segment length)
Interface IF3	
Fieldbus	POWERLINK V1/V2
Type	100 Base-T (ANSI/IEEE 802.3)
Design	Shielded RJ45 port
Transfer rate	100 MBit/s
Cable length	Max. 100 m between two stations (segment length)
Interfaces IF4 and IF5	
USB Rev. 1.1	
IF6 interface	X2X Link
CPU and X2X Link supply	
Input voltage	24 VDC (-15% / +20%)
Input current	Max. 2.2 A
Reverse polarity protection	Yes
Fuse	Integrated, cannot be exchanged
X2X Link supply output	
Rated output power	7.0 W
Parallel operation	Yes ¹⁾
Redundant operation of X2X Link supply	Yes
1) In parallel operation, only 75% of the rated power can be assumed. Please ensure that all parallel operating power supplies are switched on and off simultaneously.	
Input I/O supply	
Input voltage	24 VDC (-15% / +20%)
Fuse	Recommended pre-fusing max. 10 A slow-blow
Output I/O supply	
Rated output voltage	24 VDC
Permitted contact load	10.0 A
General supply	
Rated output voltage	24 VDC
Permitted contact load	10.0 A
Status indicators	
Overload, operating status, module status, RS232 data transfer	
Diagnostics	
Module run/error	Yes, with status LED and software status
Overload	Yes, with status LED and software status
RS232 data transfer	Yes, with status LED
Electrical isolation	
X2X bus supply	Yes
I/O supply	No

CPU CP1486

General information	X20CP1486
Status indicators	CPU function, overtemperature, Ethernet, Ethernet POWERLINK, CompactFlash, battery
Diagnostics	
CPU function	Yes, with status LED
Over-temperature	Yes, with status LED
Ethernet	Yes, with status LED
Ethernet POWERLINK	Yes, with status LED
CompactFlash	Yes, with status LED
Battery	Yes, with status LED and software status
Fans	Yes, with software status
Visual Components capability	Yes
ACOPOS capability	Yes
Cooling	Fan-free with derating (see operational conditions) Exchangeable fans for entire temperature range Fan is monitored
Electrical isolation	
PLC - IF1/IF4/IF5	No
PLC - IF2/IF3/IF6	Yes
IF1/IF4/IF5 - IF2/IF3/IF6	Yes
IF1 - IF4/IF5	No
IF4 - IF5	No
Power consumption, without memory card, without interface module and USB	13.5 W
Internal power consumption of the X2X Link and I/O supply ¹⁾	
Bus	1.42 W
I/O internal	0.6 W
Certification	CE, C-UL-US, GOST-R
<small>1) The specified values are maximum values. The exact calculation is available for download as a data sheet with the other module documentation on the B&R homepage.</small>	
Operational conditions	X20CP1486
Operating temperature	
Horizontal installation	0°C to +55°C, fan-free: 0°C to +45°C
Vertical installation	0°C to +55°C, fan-free not permitted
Relative humidity	5 to 95%, non-condensing
Mounting orientation	Horizontal or vertical
Installation at altitudes above sea level	
0 - 2000 m	No derating
>2000 m	Reduction of ambient temperature by 0.5°C per 100 m
Protection type	IP20
Storage and transport conditions	X20CP1486
Temperature	-25°C to +70°C
Relative humidity	5 to 95%, non-condensing
Mechanical characteristics	X20CP1486
Dimensions (W x H x D)	150 x 99 x 85 mm
Comment	Order application memory (CompactFlash) separately Backup battery included in delivery X20 locking plate (right) included in delivery X20 terminal block (12-pin) included in delivery Interface module slot covers included in the delivery