

AMIKON TECHNICAL DOCUMENTATION

Installation Instructions

Bently Nevada 330101-00-44-15-02-CN

3300 XL 8 mm unarmored proximity probe

THREAD	PROBE LENGTH	CASE	ARMOR
3/8-24 UNF	1.5 m total	4.4 in	Without armor

For qualified personnel. This reference does not replace the complete controlled manufacturer instructions, site procedures, approved hazardous-area drawings or the supplied unit's certificate.

01


CONFIRM ORDERED CONFIGURATION

Mounting thread	3/8-24 UNF-2A, without armor
Unthreaded length, option 00	0.0 in
Overall case length, option 44	4.4 in
Total probe length, option 15	1.5 m; not a complete electrical system length
Connector / cable, option 02	Miniature ClickLoc; standard cable; no protector included
Approval option CN	Country-specific selection; verify supplied-unit markings

02

MECHANICAL INSTALLATION CONTROLS

- Maximum thread engagement for 3/8-24: 0.563 in. Overall case length is not the permitted engagement length (source p. 8).
- Use source Figure 14 on p. 35 and its figure notes on p. 41, reproduced on the next two pages without alteration.
- Standard forward-mount recommended torque: 11.2 N m; for the first three threads, 7.5 N m (source p. 7). Follow the applicable mounting condition.

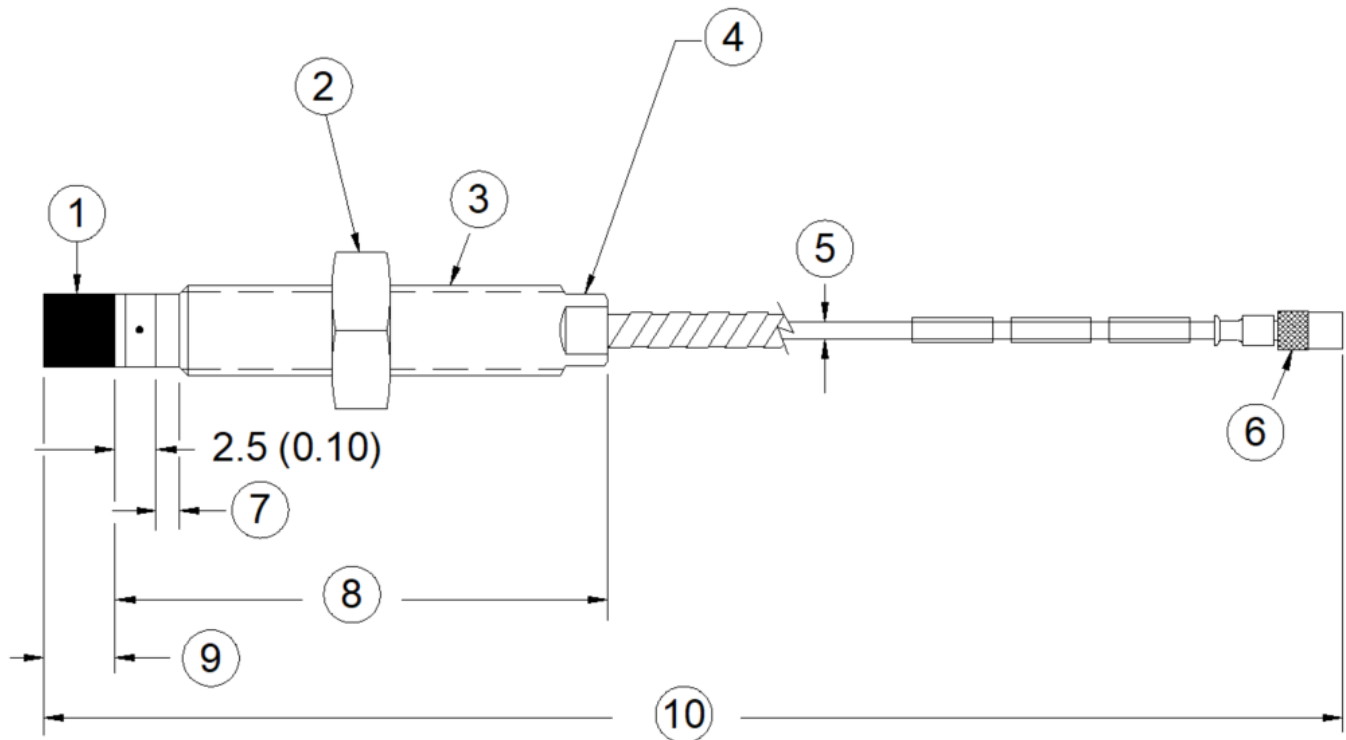

1. Probe tip, 8.0 mm (0.31 in) diameter
2. 9/16 in for 3/8-24 threads, M17 for M10 threads (see Note 2)
3. Case thread
4. 5/16 in wrench flats for 3/8-24 threads; 8mm wrench flats for M10 threads.
5. 75 Ω cable, 3.68 mm (0.145 in) maximum outside diameter, 3.94 mm (0.155 in) maximum outside diameter for FluidLoc cable, 7.67 mm (0.302 in) outside diameter of armor, 9.5 mm (0.38 in) maximum diameter of armor ferrule
6. Miniature male coaxial connector, 7.24 mm (0.285 in) maximum outside diameter "D"
7. Unthreaded length "A"
8. Case length "B"
9. 6.0 mm (0.235 in) maximum
10. Total length "C", +30%, -0%³


Figure 14: 3300 XL 8 mm Proximity Probes, Standard Mount

330101 and 330191, 3/8-24 UNF-2A, without armor ⁷

330102 and 330192, 3/8-24 UNF-2A, with armor ⁶

330103 and 330193, M10X1 thread, without armor ⁷

330104 and 330194, M10X1 thread, with armor ⁶

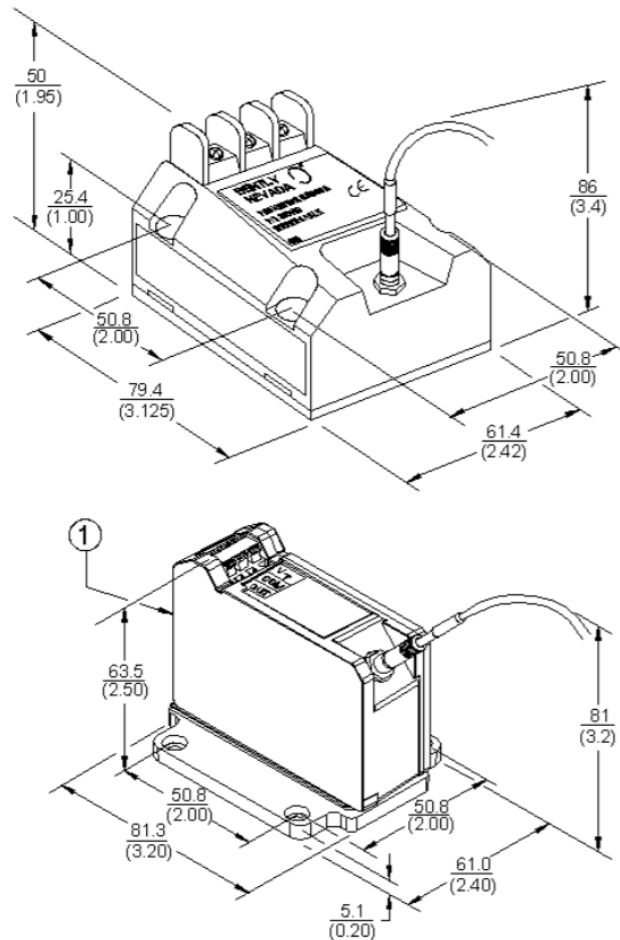

1. Mounting option "A", Options -50 or -90

Figure 21: Physical Mounting Characteristics Showing Interchangeability of 3300 and 3300 XL Proximitors when 4-hole Mounting Option Is Used⁸

Figure Notes:

1. All dimensions on figures are in millimeters (inches) unless otherwise noted.
2. Standard mount 8 mm probes supplied with M17 or 9/16 inch lock nut.
3. Probes ordered with 5 or 9 meter integral cables have a length tolerance of +20%, -0%.
4. Reverse mount probes not available with armor or connector protector options.
5. Letters inside quotation marks on figures refer to probe ordering options.
6. Stainless steel armor is supplied with FEP outer jacket for standard probes, PFA outer jacket for ETR probes.
7. FEP jacket is standard non-armored portion of the cable for standard probes, PFA jacket on non-armored portion for ETR probes.
8. Use M3.5 or #6 screws for panel-mount Proximitors Sensors (screws provided when purchasing Bently Nevada housings).

03 CONNECTION & SYSTEM CHECKS

Electrical system selection	The 1.5 m probe is not a complete 1.5 m system. Select the documented extension cable and Proximitar combination for the required electrical system.
Two gold XL ClickLoc connectors	Finger tight. A mixed non-XL stainless / XL connection has separate instructions; identify both connectors first.
Target calibration	Standard system conditions use AISI 4140 steel; other target materials require manufacturer calibration review.
Radial gap, complete system	-9 Vdc, approximately 1.27 mm, under the datasheet's stated conditions; not a standalone probe output.

04 ENVIRONMENT & APPROVAL REVIEW

- Standard probe operating/storage rating is -52 to +177 C. Temperatures below -34 C may cause premature pressure-seal failure.
- Probes are not pressure-tested before shipment. Where a pressure seal is required, consult Bently Nevada and provide safe leakage containment.
- Confirm CN markings and the applicable NEPSI/CCC and other certificate conditions. The country option does not establish every hazardous-area installation rating.
- For shaft vibration, check shaft diameter and probe spacing. For speed or overspeed duty, consult the manufacturer's dedicated application guidance.

05 OFFICIAL DOCUMENTATION

Bently Nevada 141194 Rev. AM - complete manufacturer source

CN approval guide 108M1756 Rev. AV - pp. 10 and 26

Basis: 141194 pp. 1-6 (system/target), 7-9 (mounting/environment), 10-13 (approvals/ordering), 35 and 41 (drawing/notes). Verify the actual controlled installation requirements

AMIKON PRODUCT SUPPORT

+86-18020776786

INFO@AMIKON.CN

AMIKONG.COM