

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

ABB

V18345-2010421001

TZIDC ELECTRO-PNEUMATIC POSITIONER

Applicable product family: ABB TZIDC valve positioners

OFFICIAL SOURCE

V18345-2010421001.pdf

The following pages are selected from the supplied manufacturer document and retain their original page content.

for 4 ... 20 mA two-wire technology

- Low operating cost
- Compact design
- Well-proven technology
- Robust and environmentally ruggedized
- Wide operating temperature range
-40 ... 85 °C (-40 ... 185 °F)
- Easy to commission, “single pushbutton”
operating philosophy
- Mechanical position indicator
- ATEX, FM, CSA, GOST and IECEx approvals
- For SIL2 safety loops



Compact, well-proven, and flexible



Contents

1	Description	3
1.1	Pneumatics.....	3
1.2	Operation.....	3
1.3	Communication	3
1.4	Inputs and outputs.....	3
1.5	Modular design.....	3
2	Mounting versions.....	5
2.1	To linear actuators in accordance with the standard	5
2.2	To rotary actuators in accordance with the standard	5
2.3	Integral mounting to control valves	5
2.4	Special actuator-specific mounting	5
3	Operation.....	7
3.1	General.....	7
3.2	Operator panel	8
4	Communication	9
4.1	DTM.....	9
4.2	LKS adapter (RS-232 interface converter).....	9
4.3	FSK Modem	9
5	Technical data.....	10
5.1	Input.....	10
5.2	Output.....	10
5.3	Travel.....	10
5.4	Air supply	10
5.5	Transmission data and influences.....	10
5.6	Environmental capabilities	11
5.7	Housing	11
5.8	Safety Integrity Level.....	11
5.9	Explosion protection	12
5.10	Options	13
5.11	Accessories	14
6	Electrical connection	15
7	Dimensions	17
8	Ordering information.....	20
8.1	Additional ordering information	21
8.2	Order information, accessories 1	22
8.3	Order information, accessories 2	23
8.4	Order information, accessories 3	24

1 Description

The TZIDC is an electronically configurable positioner with communication capabilities designed for mounting to pneumatic linear or rotary actuators. It features a small and compact design, a modular construction, and an excellent cost-performance ratio.

Fully automatic determination of the control parameters and adaptation to the final control element yield considerable time savings and an optimal control behavior.

1.1 Pneumatics

An I/P module with subsequent pneumatic amplifier is used to control the pneumatic actuator. The well-proven I/P module proportionally converts the permanent electrical positioning signal from the CPU into a pneumatic signal used to adjust a 3/3-way valve.

The air flow for pressurizing or depressurizing the actuator is continuously adjusted. As a result, excellent control is achieved. When reaching the set point, the 3/3-way valve is closed in center position to minimize the air consumption.

Four different pneumatics versions are available: for single-acting or double-acting actuators, each with "fail-safe" or "fail-freeze" function.

1.1.1 "Fail-safe" function

If the electrical power supply fails, the positioner output 1 is depressurized, and the pneumatic actuator's return spring moves the valve to the defined safe position. In case of a double-acting actuator the second output 2 is additionally pressurized.

1.1.2 "Fail-freeze" function

If the electrical power supply should fail, the positioner output 1 (and 2, if applicable) is closed and the pneumatic actuator stops ("freezes") the valve in the current position. If compressed air supply should fail, the positioner depressurizes the actuator.

1.2 Operation

The positioner has a built-in operating panel providing a 2-line LCD and 4 pushbuttons for optimal local configuration, commissioning and operational monitoring.

Alternatively, the appropriate configuration program and the available communication option can be used.

1.3 Communication

The standard TZIDC model has a local communication interface (LKS connector). Additionally, a "HART communication" option for communication via the 20 mA signal is available. Both communications are based on the HART Protocol.

1.4 Inputs and outputs

In addition to its input for the analog position set point the TZIDC positioner is equipped with a digital input which can be used to activate various protective functions in the device via the process control system. A digital output allows you to output collective alarms or fault messages.

1.5 Modular design

The TZIDC basic model can be enhanced at any time by retrofitting optional equipment. Option modules for analog or digital position feedback or a shutdown-module can be installed. Additionally, a mechanical position indicator, proximity switches or 24 V microswitches are available for indicating the position independently of the mother board function.

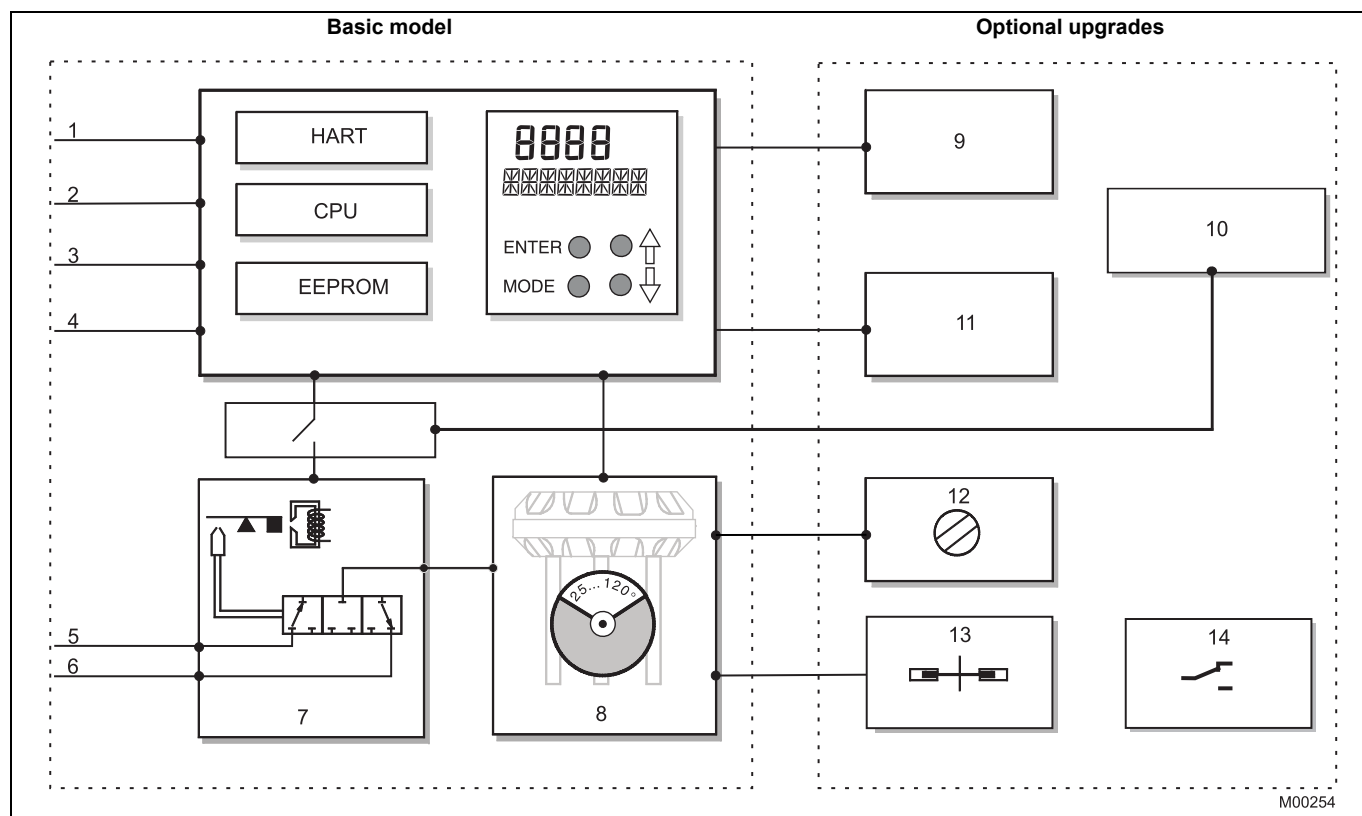


Fig. 1: TZIDC schematic diagram

Basic model

- 1 LKS plug
- 2 Positioning signal 4 ... 20 mA
- 3 Digital input
- 4 Digital output DO
- 5 Supply, 1.4 ... 6 bar
- 6 Exhaust
- 7 I/P module with 3/3-way valve
- 8 Position sensor (optional up to 270° rotation angle)

Optional upgrades

- 9 Plug module for analog feedback (4 ... 20 mA)
- 10 Plug-in module for safety shutdown (forced depressurization)
- 11 Plug module for digital feedback
- 12 Installation kit for mechanical position indicator
- 13 Installation kit for digital feedback with proximity switches
- 14 Installation kit for digital feedback with 24 V microswitches



Important

With optional upgrades either the "Installation kit for digital feedback with proximity switches" (13) or the "Installation kit for digital feedback with microswitches 24 V" (14) can be used.

In both cases, the "mechanical position indicator" (8) must be installed.

2 Mounting versions

2.1 To linear actuators in accordance with the standard

Lateral attachment is in accordance with DIN / IEC 534 (lateral attachment to NAMUR). The required attachment kit is a complete set of attachment material, but does not include the screwed pipe connections and air pipes.

2.2 To rotary actuators in accordance with the standard

This attachment is designed for mounting according to the standard VDI/VDE 3845. The attachment kit consists of a console with mounting screws for mounting on a rotary actuator. The adapter for coupling the positioner feedback shaft to the actuator shaft has to be ordered separately. Screwed pipe connections and air pipes have to be provided on site.

2.3 Integral mounting to control valves

The TZIDC positioner featuring single acting pneumatic action is also suitable for integral mounting.


The required holes are found at the back of the device.

The benefit of this design is that the point for mechanical stroke measurement is protected and that the positioner and actuator are linked internally. No external tubing is required.

2.4 Special actuator-specific mounting

In addition to the mounting methods described above, there are special actuator-specific attachments.

Please contact us for details.

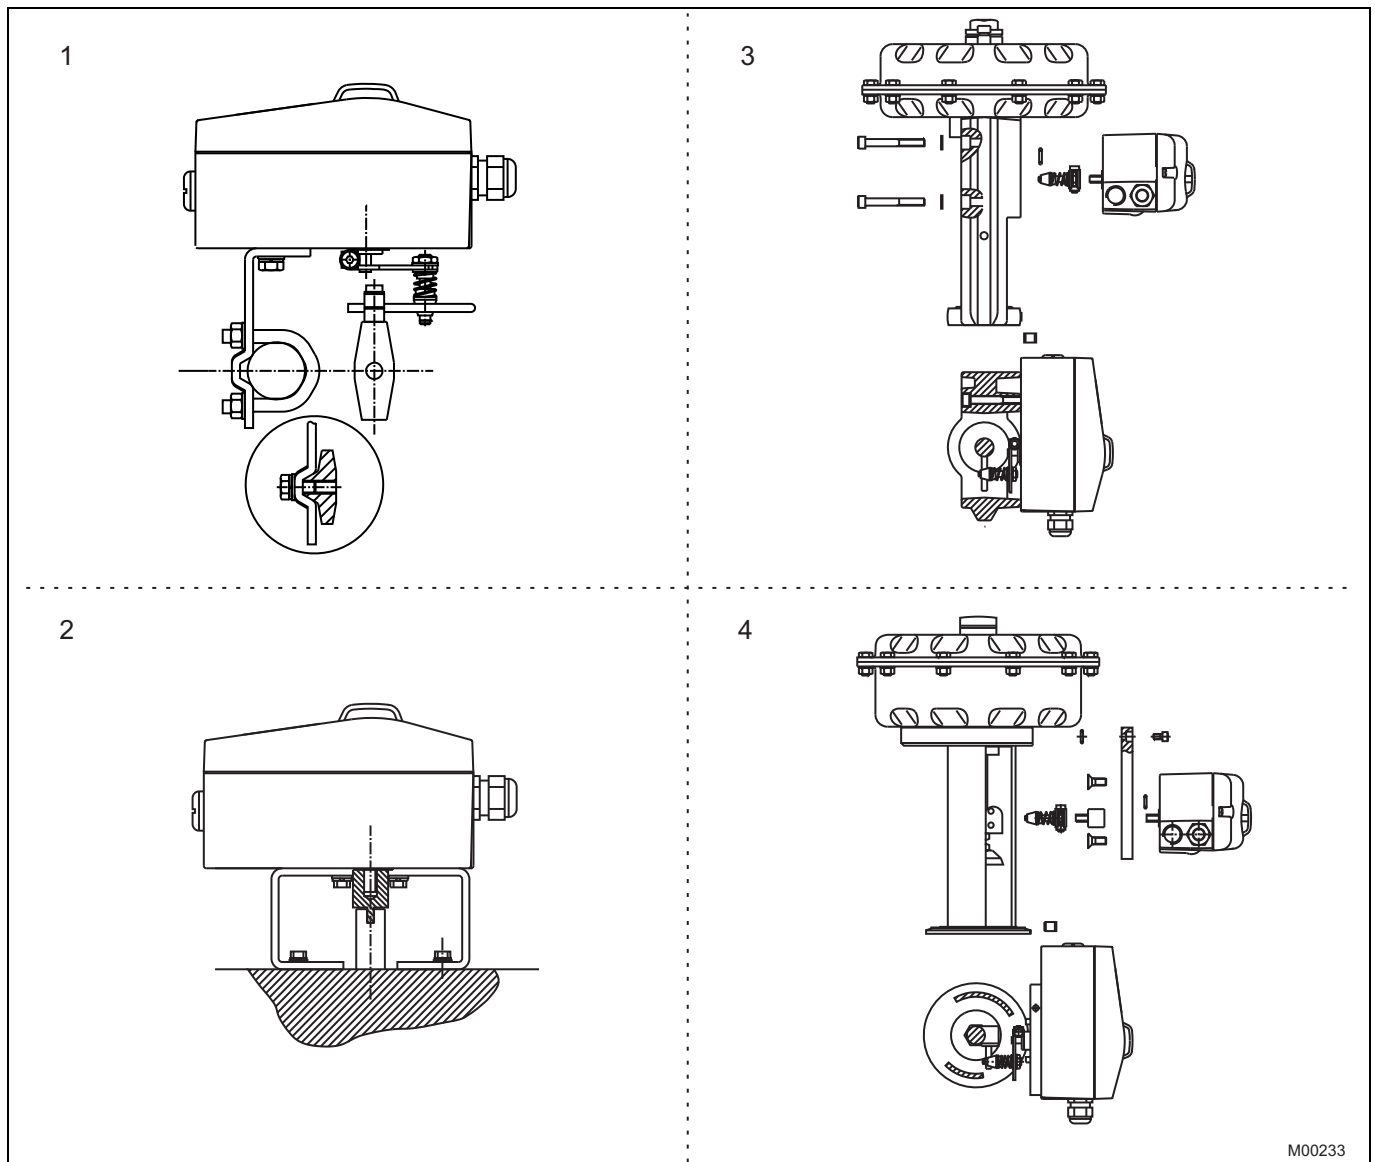

M00233

Fig. 2: Mounting options

- | | |
|--|---|
| 1 Mounting to linear actuators acc. to DIN / IEC 534 | 3 Integral mounting to control valves |
| 2 Mounting to rotary actuators to VDI / VDE 3845 | 4 Integral mounting to control valves by using an adapter panel |

3 Operation

3.1 General

Microprocessor-based position control in the TZIDC provides for optimal results. The positioner features high-precision control functions and high operational reliability. Due to their elaborate structure and easy accessibility, the device parameters can be quickly adapted to the respective application.

The total range of parameters includes:

- Operating parameters
- Adjustment parameters
- Monitoring parameters
- Diagnosis parameters
- Maintenance parameters

3.1.1 Operating parameters

The following operating parameters can be set manually if required:

Signal

Signal min. 4 mA, max. signal 20 mA (0 ... 100 %)
freely selectable for split-range operation
min. range 20 % (3.2 mA)
recommended range > 50 % (8.0 mA)

Action (positioning signal)

Increasing: Signal 4 ... 20 mA = position 0 ... 100 %
Increasing: Signal 20 ... 4 mA = position 0 ... 100 %

Characteristic curve (travel = f {signal})

Linear, equal percentage 1:25 or 1:50 or 25:1 or 50:1 or freely configurable with 20 reference points.

Travel limit

The positioning travel, i.e. the stroke or angle of rotation, can be reduced as required within the full range of 0 ... 100 %, provided that a minimum value of 20 % is observed.

Shut-off function

This parameter can be set separately for each end position. When the respective configured limit value is exceeded, the shut-off function causes immediate travel of the actuator until reaching the set end position.

When the shut-off value is set to "0", the position is further controlled, even in the respective end position.

Travel time prolongation

This function can be used to increase the max. travel time for full travel. This time parameter can be set separately for each direction.

Important

This function can only be used with the pneumatics with the safety function "fail-safe".

Switching points for the position

This parameter allows you to define two position limits for signaling (see option "Module for digital position feedback").

Digital output

The alarms generated in the TZIDC positioner can be polled via the digital output as a collective alarm.

The desired information can be selected via the operator panel or remotely via the configuration program.

The output can be set to "active high" or "active low", as required.

Digital input

For the digital input, one of the following safety options can be selected. You may use the operator's panel or configuration program to select an option.

- No function (default)
- Move to 0 % position
- Move to 100 % position
- Hold previous position
- disable local configuration
- Disable local configuration and operation
- Disable any access (no local or remote access via a PC)

The selected function is activated once the 24 V DC signal is no longer applied (< 11 V DC).

3.1.2 Adjustment parameters

The TZIDC positioner has a special function for automatic adjustment of the parameters.

Additionally, the control parameters can be set automatically (in adaptive control mode) or manually to optimally adapt them to the process requirements.

Tolerance band

Upon reaching the tolerance band, the position is slowly re-adjusted until the dead band has been reached.

Dead band (sensitivity)

When reaching the dead band, the position is held. The factory setting for this parameter is 0,1 %.

Actuator spring action

Selection of the sensor shaft rotating sense (looking into the open case), if the valve is moved to the safe position by the actuator spring (actuator is depressurized via Y1/OUT1).

For double-acting actuators the actuator spring action corresponds to pressurizing the pneumatic output (OUT2).

Display 0 ... 100 %

Adjusting the display (0 ... 100%) according to the direction of action for opening or closing the valve.

3.1.3 Monitoring parameters

Various functions for permanent operational monitoring are implemented in the TZIDC operating program. The following states will be detected and indicated, e.g.:

- 4 ... 20 mA signal out of range
- position out of the adjusted range
- positioning time-out (adjustable time parameter)
- position controller inactive
- counter limits (settable in the diagnosis phase) exceeded

While automatic commissioning is in progress, the current state is continuously indicated on the integrated LCD.

During operation, the LCD shows the most important process variables:

- current position (in %),
- malfunctions, alarms, messages (as code)

Access to extended monitoring parameters is possible via HART communication and the DTM.

3.1.4 Diagnosis parameters

The diagnosis parameters of the TZIDC program inform the operator about the operating conditions of the valve.

From this information the operator can derive which maintenance works are required, and when.

Additionally, limit values can be defined for these parameters. When they are exceeded, an alarm is reported.

The following values are e.g. determined:

- Number of movements performed by the valve
- Total travel

The diagnosis parameters and limit values can be called up, set, and reset via HART communication, using the configuration program.

3.2 Operator panel

The TZIDC positioner's operator panel with four pushbuttons allows for

- operational monitoring
- manual control
- configuration
- fully automatic commissioning

The operator panel is protected by a cover which avoids unauthorized access to the operating elements.

3.2.1 Single-button commissioning

Commissioning the TZIDC positioner is especially easy. The standard Autoadjust function for automatic adaptation of the device parameters can be started by simply pressing a single front panel button, and without knowing parameterization details.

Depending on the selected actuator type (linear or rotary), the displayed zero position is automatically adapted:

- for linear actuators counter-clockwise (CTCLOCKW)
- for rotary actuators clockwise (CLOCKW).

Besides this standard function, a customized "Autoadjust" function is available. The function is launched either via the operator's panel or HART communication.

3.2.2 Display

The information indicated by the 2-line LC display is permanently updated and adapted during operation, to inform the operator in an optimal way.

During control operation (control with or without adaptation) the following TZIDC data can be called up by pressing the pushbuttons briefly:

- Up button: Current setpoint (mA)
- Down button: Temperature in device
- Up + Down buttons: Current control deviation



Fig. 3: TZIDC with removed cover, view of the operator panel

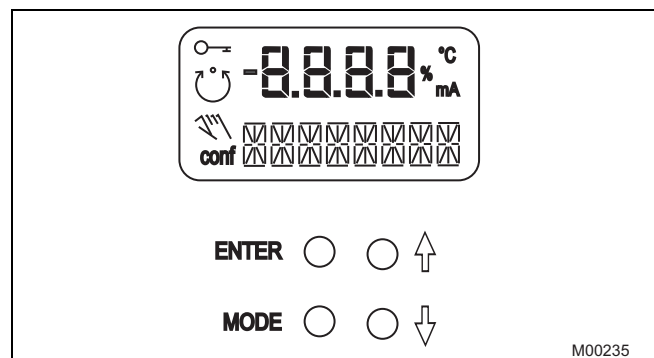


Fig. 4: TZIDC operating elements and display

4 Communication

4.1 DTM

The DTM (Device Type Manager) for TZIDC is based on the FDT/DTM technology (FDT 1.2) and can be integrated in a process control system or loaded in a PC with the DSV401 (SMART VISION) program. This allows you to work with the same user interface in the commissioning phase, during operation, and for service tasks for monitoring the device, setting parameters, and uploading data.

Communication is based on the HART protocol. It occurs via a local interface connection (LKS) or in frequency-modulated mode using an FSK-modem connected at any chosen point of the 20 mA signal line. Communication has no effect on operation. Newly set parameters are saved in the non-volatile memory directly upon the download into the device, and become active immediately.

4.2 LKS adapter (RS-232 interface converter)

You can easily connect your TZIDC positioner to a PC, e.g., in the workshop or in the commissioning phase, by using the positioner's LKS adapter (LKS = local communication interface).

An RS-232 interface converter adapts the signals on the serial PC port to the level of the positioner's LKS.

4.3 FSK Modem

The FSK modem establishes a digital frequency-modulated communication (Frequency Shift Keying) with the TZIDC positioner.

Tapping is possible at any chosen point of the 20 mA signal line.

We recommend that you use an electrically isolated FSK modem. It is bus-compatible when used with isolating amplifiers. Even connecting explosion-protected field devices is possible, on condition that the FSK modem is run outside the hazardous area.

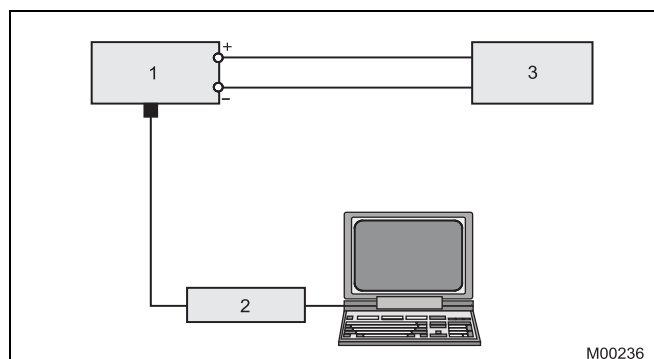


Fig. 5: Local communication via LKS adapter

- | | |
|---------------|--------------|
| 1 TZIDC | 3 Controller |
| 2 LKS adapter | |

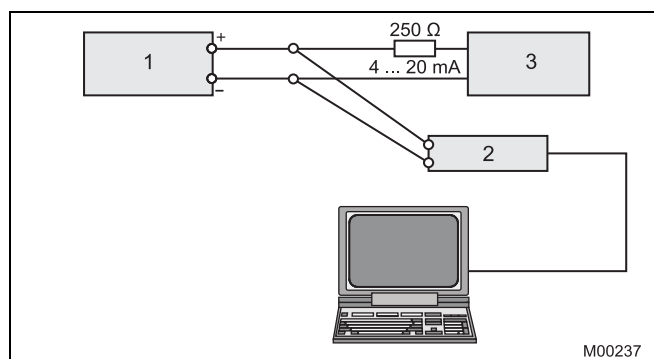


Fig. 6: HART communication with FSK modem via 20 mA signal line

- | | |
|-------------|--------------|
| 1 TZIDC | 3 Controller |
| 2 FSK modem | |

5 Technical data

5.1 Input

Output signal (two-wire technology)

Nominal range	4 ... 20 mA
Split range configuration between	20 ... 100 % of the nominal range
Max.	50 mA
Min.	3.6 mA
Starting at	3.8 mA
Load voltage at 20 mA	9.7 V
Impedance at 20 mA	485 Ω

Digital input

Control voltage	0 ... 5 V DC logical switching state "0" 11 ... 30 V DC logical switching state "1"
Current	max. 4 mA

5.2 Output

Compressed air output

Range	0 ... 6 bar (0 ... 90 psi)
Air capacity	5.0 kg/h = 3.9 Nm ³ /h = 2.3 scfm at 1.4 bar (20 psi) supply pressure 13 kg/h = 10 Nm ³ /h = 6.0 scfm at 6 bar (90 psi) supply pressure
Output function	For single or double-acting actuators, air is vented from actuator or actuator is blocked in case of (electrical) power failure
Shut-off values	End position 0 % = 0 ... 45 % End position 100 % = 55 ... 100 %

Digital output (control circuit to DIN 19234/NAMUR)

Supply voltage	5 ... 11 V DC
Current > 0.35 mA ... < 1.2 mA	Switching state logical "0"
Current > 2.1 mA	Switching state logical "1"
Effective direction (configurable)	normally logical "0" or logical "1"

5.3 Travel

Rotation angle

Used range	25 ... 120 (rotary actuators, optional 270°) 25 ... 60 ° (linear actuators)
Travel limit	Min. and max. limits, freely configurable between 0 ... 100 % of total travel (min. range > 20 %)
Travel time prolongation	Range of 0 ... 200 seconds, separately for each direction
Dead band time limit	Setting range 0 ... 200 seconds (monitoring parameter for control until the deviation reaches the dead band)

5.4 Air supply

Instrument air

free of oil, water and dust acc. to DIN / ISO 8573-1
pollution and oil content according to Class 3 (purity: max. particle size: 5 μ m, max. particle density: 5 mg / m³; oil content: max. concentration: 1 mg / m³; pressure dew point: 10 K below operating temperature

Supply pressure

1.4 ... 6 bar (20 ... 90 psi)

Note: Do not exceed the max. operating pressure of the actuator!

Air consumption

< 0.03 kg/h / 0.015 scfm (independent of supply pressure)

5.5 Transmission data and influences

Output Y1

Increasing	Increasing output signal 0 ... 100 % Increasing pressure at output
Decreasing	Increasing output signal 0 ... 100 % Decreasing pressure at output

Action (output signal)

Increasing	Signal 4 ... 20 mA = actuator position 0 ... 100%
Decreasing	Signal 20 ... 4 mA = actuator position 0 ... 100%

Characteristic curve (travel = f {signal})

Linear, equal percentage 1:25 or 1:50 or 25:1 or 50:1 and freely configurable with 20 reference points.

Deviation	≤ 0.5 %
Tolerance band	0.3 ... 10 %, adjustable
Dead band	0.1 ... 10 %, adjustable
Resolution (A/D conversion)	> 16000 steps
Sample rate	20 ms
Influence of ambient temperature	≤ 0.5 % per 10 K
Influence of vibration	≤ 1 % to 10 g and 80 Hz

Seismic vibration

Meets requirements of DIN / IEC 68-3-3 Class III for strong and strongest earthquakes.

Influence of mounting orientation

Not measurable.

Complies with the following directives

- EMC Directive 89 / 336 / EWG as of May 1989
- EC Directive for CE conformity marking

Communication

- HART Protocol 5.9
- Local connector for LKS (not in Ex area)
- HART communication via 20 mA signal line with (optional) FSK modem

5.6 Environmental capabilities

Ambient temperature

For operation, storage and transport: -40 ... 85 °C (-40 ... 185 °F)

When using proximity switches SJ2-S1N (NO): -25 ... 85 °C (-13 ... 185 °F)

Relative humidity

Operational (with closed housing and air supply switched on): 95 % (annual average), condensation permissible

Transport and storage: 75 % (annual average), non-condensing

5.7 Housing

Material/Protections

Aluminum, protection class IP 65 / NEMA 4X

Surface/color

Electrostatic dipping varnish with epoxy resin, stove-hardened. Case varnished black, RAL 9005, matte, housing cover Pantone 420.

Electrical connections

Screw terminals: Max. 1.0 mm² for options,
Max. 2.5 mm² for analog signal.

Note: Do not expose the terminals to strain.

Cable entry: 2 tap holes 1/2-14 NPT or
M20 x 1.5 (1 x with cable gland and
1 x with pipe plug)

Pneumatic connections

Threads G 1/4 or 1/4-18 NPT

Weight

1.7 kg

Mounting orientation

any orientation allowed

Dimensions

see dimensional drawings

5.8 Safety Integrity Level



Important

Applies to applications with single-acting and depressurizing pneumatics.

The positioner TZIDC and the emergency shutdown module for TZIDC meet the requirements regarding:

- functional safety acc. to IEC 61508
- explosion protection (depending on the model)
- electromagnetic compatibility in accordance with EN 61000

Without the input signal, the pneumatic module in the positioner vents the drive and the installed spring in it moves the valve in a predetermined end position (OPEN or CLOSED).

SIL specific safety-related characteristics:

Device	SFF	PFDav	$\lambda_{dd} + \lambda_s$	λ_{du}
TZIDC / TZIDC-200 as shutdown module	94 %	$1,76 \cdot 10^{-4}$	718 FIT	40 FIT
TZIDC / TZIDC-200 with supply current 0 mA	94 %	$1,76 \cdot 10^{-4}$	651 FIT	40 FIT

For details refer to the Management Summary in the SIL-Safety Instructions 37/18-79XA.

5.9 Explosion protection



Important

The values indicated here are taken from the respective approval certificates.
Always observe the specifications and supplements in the certificates.
(see operating instructions).

FM J.I. 3005029 (3610, 3611)

Intrinsically safe

Class I, Div. 1 Grp. A-B-C-D

Class II, Div. 1 Grp. E-F-G

CL III, Div. 1

Non-incendive, suitable for use in Div. 2 environment

CSA Certification 1052414

Intrinsically safe; Enclosure 4X; T4, max. 85 °C

Class I, Div. 1 Grp. A-B-C-D

Class II, Div. 1 Grp. E-F-G

CL III, Div. 1

Non-incendive; Enclosure 4X, max. 85 °C

Class I, Div. 2 Grp. A-B-C-D

Class II, Div. 2 Grp. E-F-G

CL III

ATEX / GOST Russia / GOST Ukraine

II 2G EEx ib IIC T6

Prototype test certificate: TÜV 98 ATEX 1370 X
Type: Intrinsically safe equipment
Device class: II 2G (EEx ib IIC)
Temperature class: T4, T5, T6
Permissible ambient temperature: T4: $-40\text{ °C} \leq T_{\text{amb}} \leq 85\text{ °C}$
T5: $-40\text{ °C} \leq T_{\text{amb}} \leq 50\text{ °C}$
T6: $-40\text{ °C} \leq T_{\text{amb}} \leq 35\text{ °C}$

ATEX

II 2G EEx ib IIC T6

II 2G EEx ia IIC T6

Prototype test certificate: TÜV 04 ATEX 2702 X
Type: Intrinsically safe equipment
Device class: II 2G (EEx ib IIC)
II 2G (EEx ia IIC)
Temperature class: T4, T5, T6
Permissible ambient temperature: T4: $-40\text{ °C} \leq T_{\text{amb}} \leq 85\text{ °C}$
T5: $-40\text{ °C} \leq T_{\text{amb}} \leq 50\text{ °C}$
T6: $-40\text{ °C} \leq T_{\text{amb}} \leq 35\text{ °C}$

ATEX

Prototype test certificate:

Type:

Device class:

Temperature class:

Permissible ambient temperature: T4: $-40\text{ °C} \leq T_{\text{amb}} \leq 85\text{ °C}$

II 3G EEx n A II T6

TÜV 02 ATEX 1943 X

Explosion-proof equipment
(Zone 2)

II 3G (EEx n A II)

T4, T5, T6

T5: $-40\text{ °C} \leq T_{\text{amb}} \leq 65\text{ °C}$

T6: $-40\text{ °C} \leq T_{\text{amb}} \leq 50\text{ °C}$

ATEX

Prototype test certificate:

Type:

Device class:

II 2 D IP 6X T 46 °C

TÜV 04 ATEX 2702 X

Intrinsically safe equipment

II 2 D (IP 6X)

Permissible housing surface temperature	Permissible ambient temperature (II D)
T81 °C	-40 ... 70 °C
T61 °C	-40 ... 50 °C
T46 °C	-40 ... 35 °C

IECEx

Prototype test certificate:

Type:

Temperature class:

Permissible ambient temperature: T4: $-40\text{ °C} \leq T_{\text{amb}} \leq 85\text{ °C}$

T5: $-40\text{ °C} \leq T_{\text{amb}} \leq 50\text{ °C}$

T6: $-40\text{ °C} \leq T_{\text{amb}} \leq 35\text{ °C}$

Ex ib IIC T6

IECEx TUN 04.0015X,
Issue no.: 0

Intrinsically safe

T4, T5, T6

5.10 Options

Module for analog position feedback¹⁾

Signal range	4 ... 20 mA (configurable split ranges)
Supply, 2-wire circuitry	24 V DC (10 ... 30 V DC) 48 V DC (20 ... 48 V DC, no ignition protection)
Characteristic curve (configurable)	Rising or falling
Deviation	< 1 %



Important

Without a signal from the positioner (e.g., "no energy" or "initializing") the module sets the output to > 20 mA (alarm level)

Module for digital position feedback¹⁾

Two switches for digital position feedback (position adjustable within the range of 0 ... 100 %, ranges cannot overlap)

Current circuits acc. to DIN 19234 / NAMUR

Supply voltage	5 ... 11 V DC
Signal current < 1.2 mA	Switching state logical "0"
Signal current > 2.1 mA	Switching state logical "1"
Direction of action	normally logical "0" or logical "1" (configurable)

Module for the emergency shutdown function²⁾

Supply voltage	24 V DC (20 ... 30 V DC) (galvanically isolated from input signal)
Safe position is activated when	Voltage < 5 V
Explosion protection	see certificate (operating instructions)
SIL	See "Safety Integrity Level"

A separate 24 V DC signal is normally applied to the emergency shutdown module, which connects through the signal from the microprocessor to the I/P module.
When the 24 V DC signal is interrupted, the pneumatic module executes the respective safety function, depending on the mechanical construction:

The positioner output 1 is depressurized, and the valve is moved to the safe position. In case of a double-acting actuator the second output 2 is additionally pressurized.



Important

The emergency shutdown module can only be used with pneumatics with the safe position "fail-safe".

The emergency shutdown module works independently of the mother board, i.e. all information from the final control element is available in the supervisory process control system at any time.

- 1) The module for analog position feedback and the module for digital position feedback plug in separate slots and can be used together.
- 2) The module for the emergency shutdown function uses the same space as the module for analog feedback and the module for analog or digital feedback and cannot be plugged in and run together with any of them.

Digital position feedback with proximity switches

Two proximity switches for independent position signaling. Switching points adjustable between 0 ... 100 %

Current circuits acc. to DIN 19234 / NAMUR

Supply voltage	5 ... 11 V DC
Signal current < 1.2 mA	Switching state logical "0"
Signal current > 2.1 mA	Switching state logical "1"

Direction of action (logical state)

Proximity switch	Position			
	< Lim. 1	> Lim. 1	< Lim. 2	> Lim. 2
SJ2-SN (NC)	0	1	1	0
SJ2-S1N (NO)	1	0	0	1



Important

When using proximity switch SJ2_S1N (NO), the positioner TZIDC may only be used at an ambient temperature range -25 ... 85 °C (-13 ... 185 °F).

Digital position feedback with 24 V microswitches

Two microswitches for independent position signaling. Switching points adjustable between 0 ... 100 %.

Voltage	max. 24 V AC / DC
Load rating	max. 2 A
Contact surface	10 µm Gold (AU)

Mechanical position indicator

Indicator disk in enclosure cover, linked with positioner feedback shaft.



Important

These options are also available for retrofitting by Service.

5.11 Accessories

Mounting material

Attachment kit for linear actuators to DIN/IEC 534 / NAMUR
Attachment kit for rotary actuators to VDI/VDE 3845
Attachment kit for integral mounting to control valves
Attachment kit for actuator-specific attachment upon request

Pressure gauge block

With pressure gauges for supply and output pressure. Pressure gauges with housing $\varnothing$ 28 mm (1.10 inch), with connection block in aluminum, black with installation material for mounting to TZIDC.

Filter regulator

All metal version in brass, varnished black, bronze filter element, 40 μ m, with condensate drain.

max. pre-pressure 16 bar (232 psi) , output adjustable to 1.4 ... 6 bar (20.31 ... 87.02 psi)



Important

The filter regulator may only be installed in combination with the pressure gauge block (accessory).

PC adapter for communication

LKS adapter f. plug conn. to TZIDC
FSK modem for HART communication
(see data sheet 63_6.71)

PC software for remote configuration and operation

DSV401 (SMART VISION) with DTM for TZIDC/TZIDC-200 available on CD ROM (see data sheet 63_1.20)

6 Electrical connection


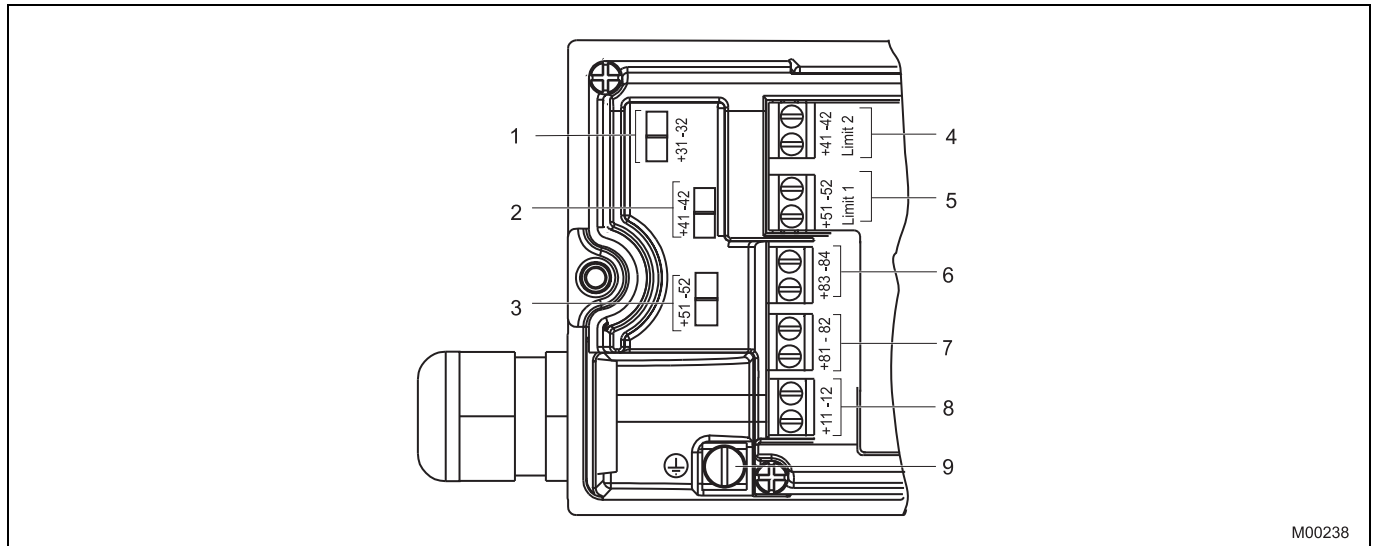


Fig. 7: Screw terminals, overview

- | | |
|--|--|
| 1 Module for analog position feedback | 5 Digital position feedback, either proximity switches or 24 V microswitches |
| 2 Module for digital feedback or service switch of emergency shutdown module | 6 Digital output DO |
| 3 Module for digital feedback or terminals for emergency shutdown module | 7 Digital input |
| 4 Digital position feedback, either proximity switches or 24 V microswitches | 8 Signal 4 ... 20 mA |
| | 9 Grounding screw |

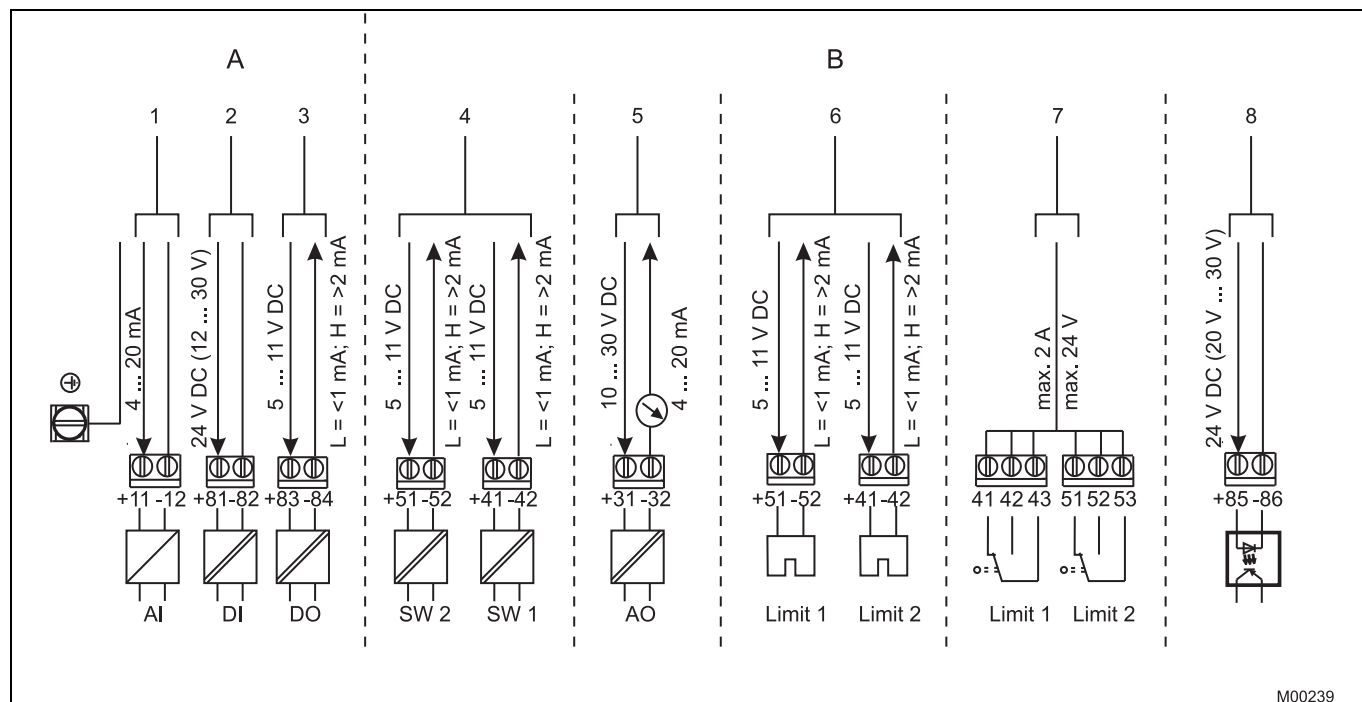

M00239


Fig. 8: Pin configuration

A Basic model
B Options

- 1 Analog input
- 2 Digital input
- 3 Digital output DO
- 4 Digital feedback
- 5 Analog feedback
- 6 Proximity switches
- 7 Microswitches
- 8 Emergency shutdown module


7 Dimensions

All dimensions in mm (inch)

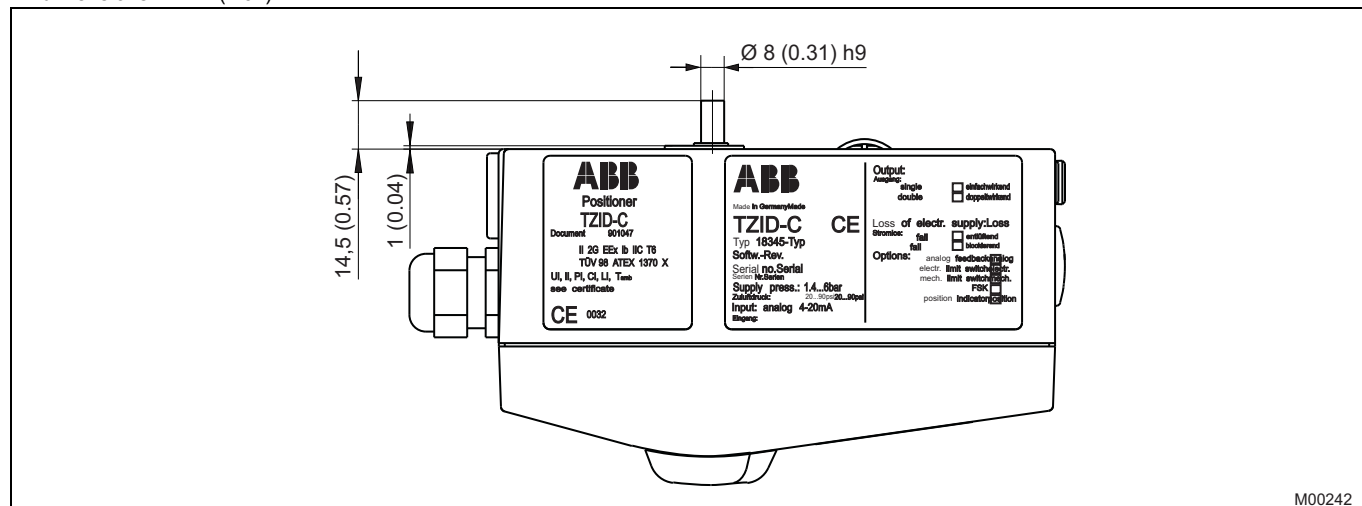

M00242

Fig. 9: Top view

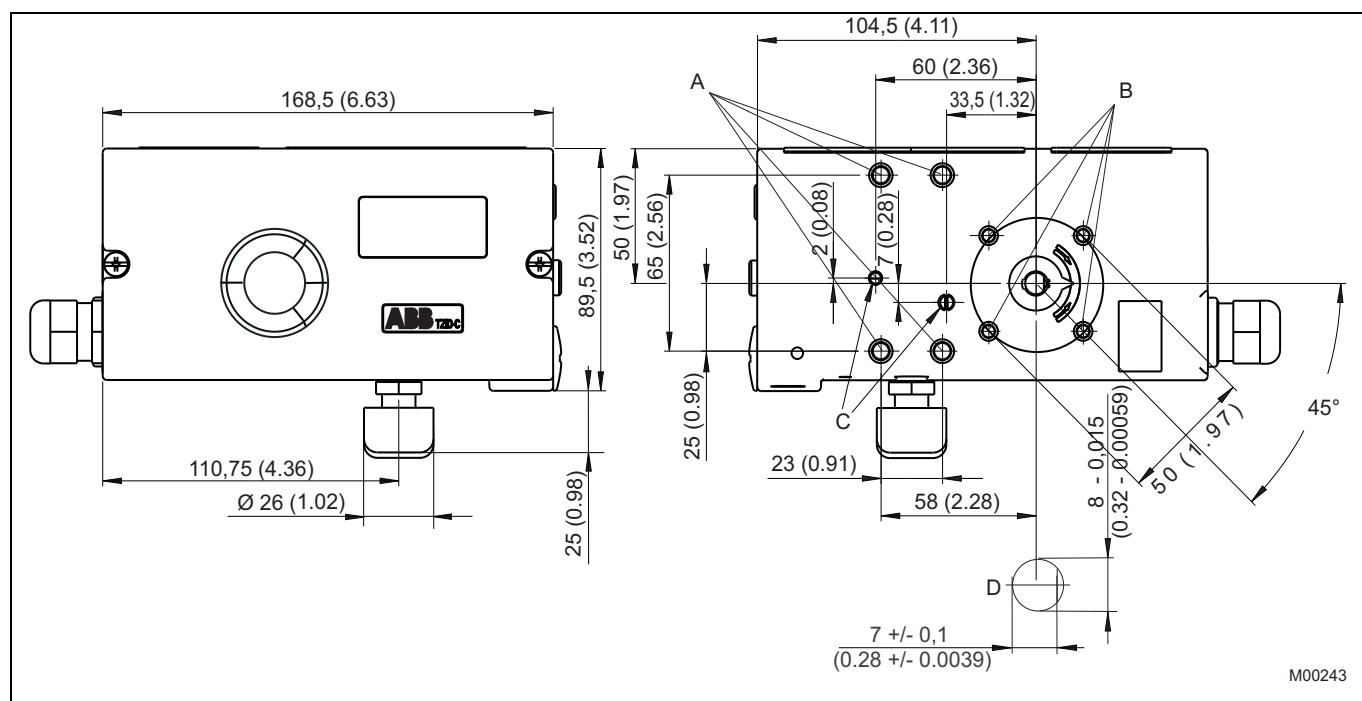

M00243

Fig. 10: Front and rear views

- A Tap hole M8 (10 mm low)
- B Tap hole M6 (8 mm low)

- C Tap hole M5 x 0.5 (air vents for direct mount)
- D Sensor shaft (larger than scale)

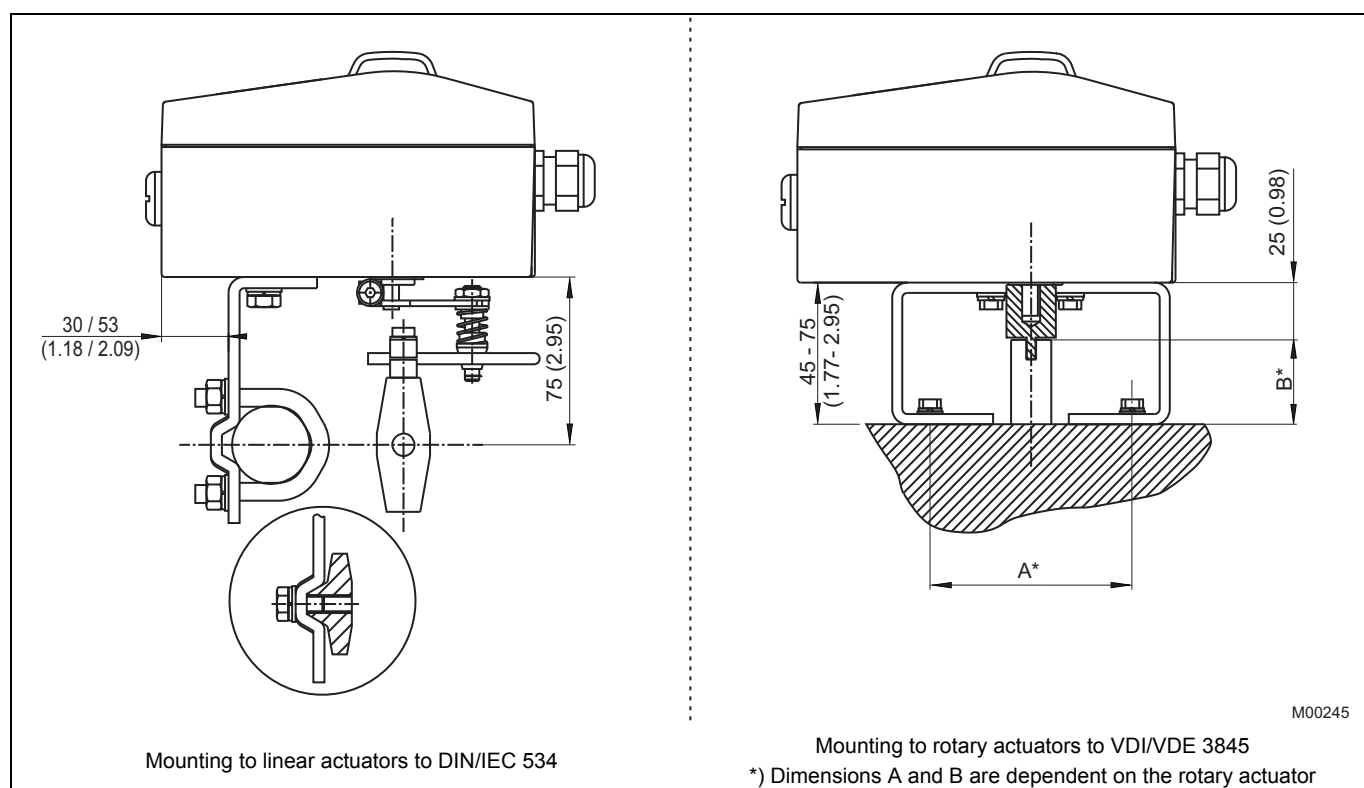
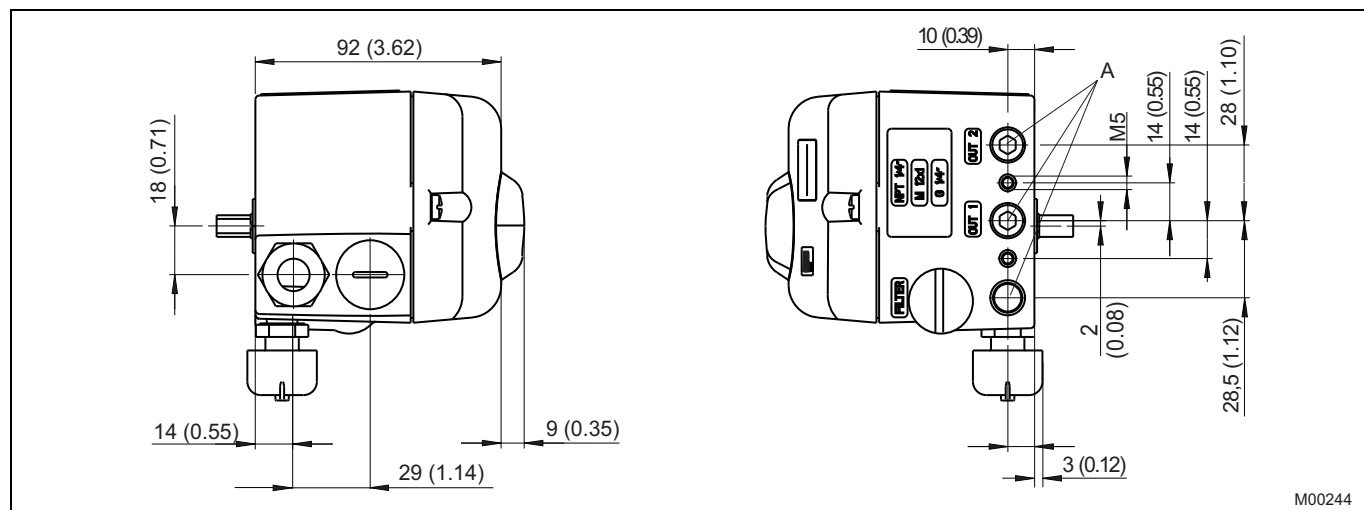


Fig. 12: Mounting drawings

8 Ordering information

Electro-Pneumatic Positioner			Variant digit No.		1	7	8	9	10	11	12	13	14	Code			
TZIDC			Catalog No.		V18345-			0									
intelligent, configurable with indicator and operator panel																	
Case / Mounting																	
Case made of aluminium, varnished, protection IP 65 (NEMA 4X)																	
for mounting to linear actuators acc. to DIN/IEC 534 / NAMUR																	
or to rotary actuators acc. to VDI/VDE 3845																	
also ready for integral mounting																	
as above, but with mechanical position indicator							1										
for mounting to rotary actuators acc. to VDI/VDE 3845							2										
with extended rotation angle up to 270°							5										
as above, but with mechanical position indicator							6										
Note:																	
For attachment according to standard, additional mounting material is required (see "Accessories")																	
Input / communication port																	
Input 4...20 mA, two-wire																	
with connector plug for LKS adapter									1								
with connector plug for LKS adapter and FSK module for HART communication									2								
Explosion protection																	
without									0								
ATEX Ex II 2 G EEx ib II C T6									1								
FM/CSA									2								
ATEX EEx n A II T6									4								
IECEX Ex ib IIC T6									5								
IECEX Ex nA II T6									6								
ATEX Ex II 2 G EEx ia II C T6									7								
GOST Russia Ex II 2 G EEx ib II C T6									B								
GOST Russia EEx n A II T6									C								
other explosion protection certificates upon request																	
Output / safe position (in case of an electrical power failure)																	
Single acting,																	
fail safe											1						
fail freeze											2						
Double acting,																	
fail safe											4						
fail freeze											5						
Connections																	
Cable: Thread 1/2-14 NPT											2						
Air pipe: Thread 1/4-18 NPT																	
Cable: Thread M20 x 1.5											5						
Air pipe: Thread 1/4-18 NPT																	
Cable: Thread M20 x 1.5											6						
Air pipe: Thread G 1/4																	
Option modules for analog or digital position feedback																	
without													0				
Plug-in module																	
analog position feedback (sign. range 4 ... 20 mA)													1				
digital position feedback													3				
shutdown module													4				
1)																	
analog position feedback (sign. range 4 ... 20 mA)																	
and digital position feedback													5				
analog position feedback (sign. range 4 ... 20 mA)																	
and shutdown module													6				
1)																	
analog position feedback (sign. range 4 ... 20 mA / 48 V)													7				
2)																	

1) only for fail safe pneumatic
2) not for explosion protected version

Continued on next page

Electro-Pneumatic Positioner TZIDC intelligent, configurable with indicator and operator panel	Variant digit No.	1 - 7	11	12	13	14	15	16	17	Code			
	Catalog No.	V18345-						0					
Optional mechanical kit for digital position feedback without Mechanical kit for digital position feedback with proximity switches SJ2-SN (NC or logical 1) 3) with proximity switches SJ2-S1N (NO or logical 0) 3) 4) with 24 V DC/AC microswitches (change-over contacts) 2) 3)													
										0			
										1			
										3			
										5			
Design (varnish / coding) Standard Special version chemistry (details on request) As specified (on request)										1 E			

8.1 Additional ordering information

										Code			
Certificates													
SIL2 - Declaration of conformity 5) 6)										CS2			
Certificate of compliance with the order acc. to EN 10204-2.1 (DIN 50049-2.1)										CF1			
Certificate of compliance with the order acc. to EN 10204-2.1 (DIN 50049-2.1) with item description										CF2			
Test Report acc. to EN 10204-2.2 (DIN 50049-2.2)										CF3			
Inspection certificate 3.1 acc. to EN 10204 with max. deviation										CBA			
Device identification label													
includes lettering (plain text, max. 16 letters)													
stainless steel 18.5 x 65 mm										MK1			
sticker 41 x 32 mm										MK2			
sticker 11 x 25 mm										MK3			

2) not for explosion protected version

3) only for model with mechanical position indicator

4) only for ambient temperature range -25 °C to +85 °C

5) not with Explosion protection ATEX Ex II 2 G EEx ia II C T6 (code 7)

6) only for single acting and fail safe pneumatic

8.2 Order information, accessories 1

TZIDC		Catalog No.			
Mounting material and cost					
Attachment kit for linear actuators (lateral attachment to DIN/IEC 534 / NAMUR) stroke 10 ... 35 mm		7959125			
		stroke 20 ... 100 mm	7959126		
Attachment kit for rotary actuators (mounting to VDI/VDE 3845) consisting of:					
a) Adapter (shaft coupler)		7959110			
b) Mounting bracket dimension A/B = 80/20 mm		319603			
		dimension A/B = 80/30 mm	319604		
		dimension A/B = 130/30 mm	319605		
		dimension A/B = 130/50 mm	319606		
Pressure gauge block		including attachment material			
for single acting TZIDC with 2 pressure gauges Ø 28 mm					
(1 x for air supply and 1 x for output pressure)					
G 1/4 connections Supply pressure range					
		0...10 bar/ 0...140 psi			
		Output pressure range 0...4 bar/ 0...60 psi	7959111		
		0...10 bar/ 0...140 psi	7959112		
1/4-18 NPT connections Supply pressure range					
		0...10 bar/ 0...140 psi			
		Output pressure range 0...4 bar/ 0...60 psi	7959113		
		0...10 bar/ 0...140 psi	7959114		
for double acting TZIDC with 3 pressure gauges Ø 28 mm					
(1 x for air supply and 2 x for output pressure)					
G 1/4 connections Supply pressure range					
		0...10 bar/ 0...140 psi			
		Output pressure range 0...4 bar/ 0...60 psi	7959115		
		0...10 bar/ 0...140 psi	7959116		
1/4-18 NPT connections Supply pressure range					
		0...10 bar/ 0...140 psi			
		Output pressure range 0...4 bar/ 0...60 psi	7959117		
		0...10 bar/ 0...140 psi	7959118		
(Pressure gauge blocks are delivered as separate units for mounting by the customer)					
Filter regulator, brass		incl. material for mounting			
connections to pressure gauge block					
		thread G 1/4	7959119		
		thread 1/4-18 NPT	7959120		
(Filter regulators are delivered as separate units for mounting by the customer)					
Adapter and operating program for digital communication					
LKS adapter		see Data Sheet 10/63-6.71 EN			
FSK modem		see Data Sheet 10/63-6.71 EN			
DSV401 (SMART VISION) on CD-ROM		see Data Sheet 10/63-1.20 EN			