

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

SIEMENS SIMATIC HMI

6AV3688-3EH47-0AX0

KP32F PN FAILSAFE KEY PANEL

Applicable product family: SIMATIC HMI key panels

OFFICIAL SOURCE

6AV3688-3EH47-0AX0.pdf

The following pages are selected from the supplied manufacturer document and retain their original page content.




ENVIRONMENTAL PRODUCT DECLARATION

SIMATIC

HMI 6AV3688-3EH47-0AX0

Type II according to ISO 14021 including life cycle impact assessment (LCIA)

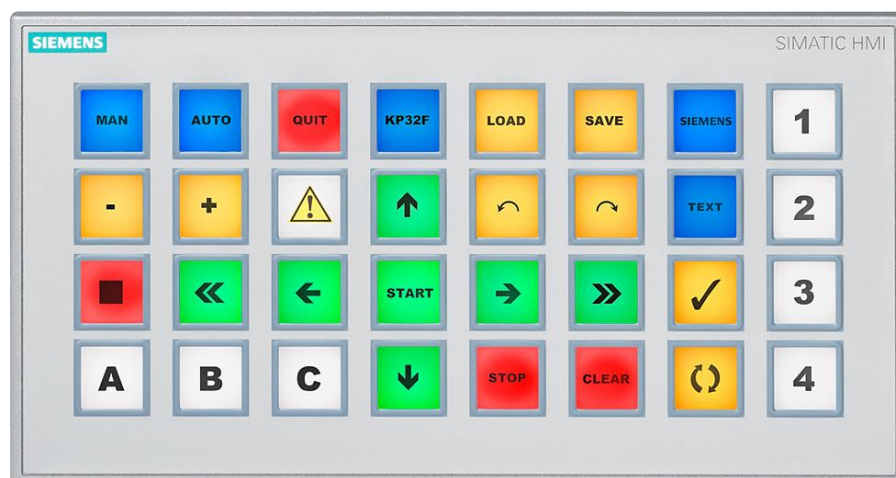


SIEMENS

General information

This environmental product declaration (EPD) is based on the international standard ISO 14021 ("Environmental labels and declarations – Self-declared environmental claims – Type II"). The data in this EPD has been evaluated on a full-scale life cycle assessment (LCA) study according to ISO 14040/44, taking into account the product category rules (PCR) for electronic and electrotechnical products and systems defined in EN 50693.


Siemens is dedicated to an environmentally conscious design of its products in line with IEC 62430 and has implemented an operator control integrated management system according to ISO 9001, ISO 14001 and ISO 45001.

Products	6AV3688-3EH47-0AX0, including its SIPLUS extreme variants
Represented by	6AV3688-3EH47-0AX0
Product Description	SIMATIC HMI KP32F PN, Key Panel, 32 short-stroke keys with multi-colored LEDs, PROFINET interfaces with PROFIsafe, 16 DI+16 DI/DO, 4 safety DI pins, 24 V DC can be looped through parameterizable as of STEP 7 V5.5
Functional Unit	To provide a human machine interface to control tasks at machine level over the reference service lifetime of 10 years

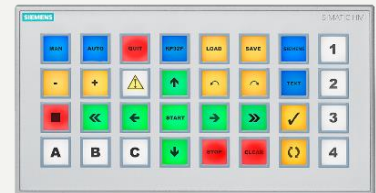

Material composition


The following chart outlines the overall material composition of the calculated reference product.

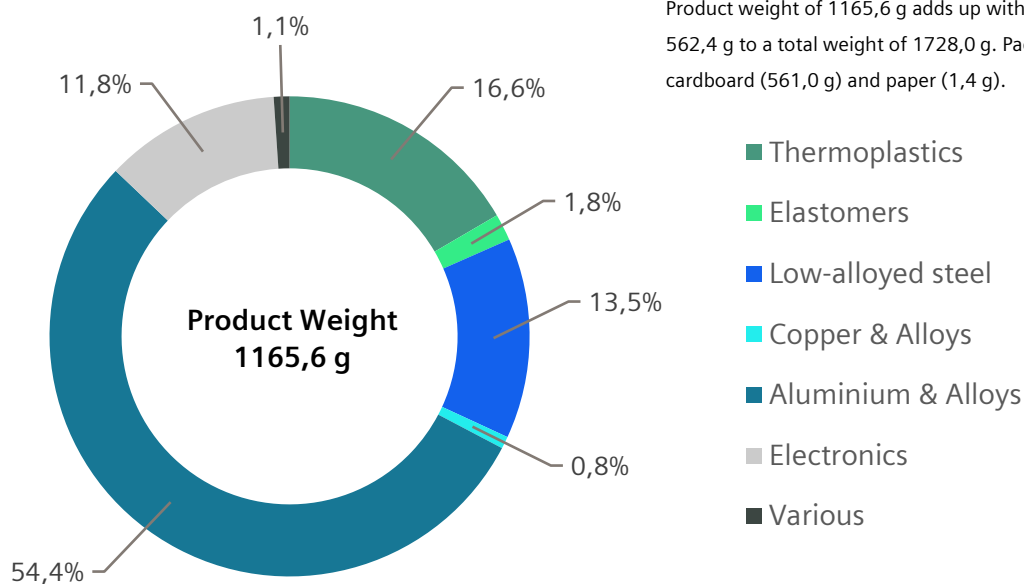

Substance assessment

At Siemens, we are committed to the development and production of environmentally sound and sustainably produced equipment. This includes avoiding hazardous substances in our products without compromising their benefits for our customers. Please visit the following website to learn more about how we comply with product-related environmental regulations like RoHS, REACH, WEEE and others: [Product Related Environmental Protection](#)

Life cycle stages and reference scenarios

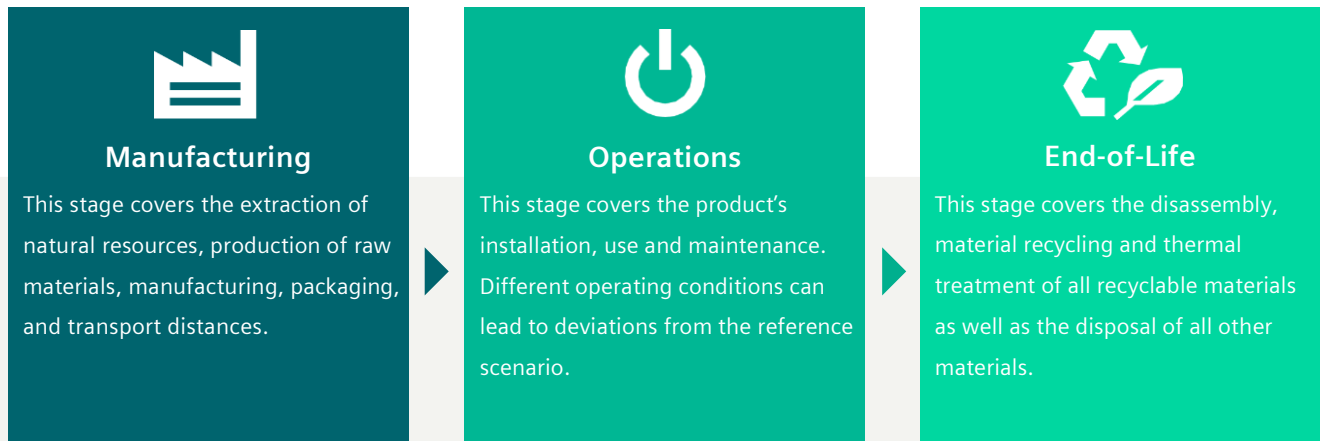

Scenarios

Energy model used: EU-28: Electricity grid mix Transportation model used: 100 km default distance, GLO: Truck-trailer, Euro IV	Energy model used: EU-28: Electricity grid mix Use scenario: 50% active mode w/ LEDs (3,8 W ¹), 20% active mode w/o LEDs (3,1 W ¹), 30% Off, reference lifetime 10 years	Energy model used: EU-28: Electricity grid mix
--	--	--

Key environmental performance indicators

The following impact categories characterize the product's environmental footprint. They have been calculated with LCIA methodology EF3.0; LCA tool: GaBi 10.6.2.9, Database: GaBi Professional & Extensions, 2022.2.

Impact category	Unit	Total	Manufacturing	Distribution ²	Operation	End-of-Life
Acidification	Mole of H ⁺ eq	2,37E-01	2,25E-01	1,68E-03	1,79E-01	-1,68E-01
Climate change – total	kg CO ₂ eq	1,13E+02	3,85E+01	2,97E-01	8,23E+01	-8,27E+00
Ecotoxicity, freshwater – total	CTUe	8,61E+02	2,45E+02	2,74E+00	6,48E+02	-3,45E+01
Eutrophication, freshwater	kg P eq	3,74E-04	1,37E-04	8,83E-07	2,38E-04	-1,93E-06
Eutrophication, marine	kg N eq	6,41E-02	3,21E-02	8,23E-04	4,01E-02	-8,94E-03
Eutrophication, terrestrial	Mole of N eq	6,79E-01	3,46E-01	9,11E-03	4,21E-01	-9,71E-02
Human toxicity, cancer – total	CTUh	2,71E-08	1,31E-08	5,53E-11	1,86E-08	-4,64E-09
Human toxicity, non-cancer – total	CTUh	9,68E-07	4,85E-07	3,06E-09	6,82E-07	-2,01E-07
Ionising radiation, human health	kBq U235 eq	4,24E+01	3,66E+00	7,15E-04	4,01E+01	-1,34E+00
Land Use	dimensionless (pt)	6,88E+02	1,13E+02	1,36E+00	5,33E+02	4,06E+01
Ozone depletion	kg CFC-11 eq	4,78E-08	4,55E-08	1,77E-14	1,19E-09	1,11E-09
Particulate matter	Disease incidences	2,60E-06	2,35E-06	5,77E-09	1,48E-06	-1,24E-06
Photochemical ozone formation	kg NMVOC eq	1,74E-01	9,68E-02	1,59E-03	1,09E-01	-3,24E-02
Resource use, fossils	MJ	1,88E+03	5,14E+02	3,95E+00	1,48E+03	-1,12E+02
Resource use, mineral and metals	kg Sb eq	1,28E-03	3,81E-03	2,48E-08	2,22E-05	-2,55E-03
Water use	m ³ world eq	2,41E+01	6,11E+00	2,65E-03	1,86E+01	-5,77E-01

¹ Measurement setup: room temperature, power supply 24 V, all PN interfaces active, DI/DQ not connected, 50% of the LEDs on in active mode w/ LEDs (lightening) and no LEDs on in active mode w/o LEDs (non-lightening)

² Distribution scenario: Truck-trailer (GLO), Euro IV, 27 t payload, 85% loading rate, 3500 km