

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Reference package for procurement and maintenance review

SIEMENS SCALANCE

6GK1415-2AA10

DP AS-INTERFACE LINK 20E

Used with the applicable SIMATIC NET gateways configuration.

REFERENCE PACKAGE

OFFICIAL DOCUMENT

Selected official manufacturer pages follow this cover.

Source: Siemens official manufacturer documentation



SIMATIC NET, DP/AS-Interface Link 20 E, Gateway PROFIBUS DP/AS-Interface according to AS-Interface specification V 3.0 in degree of protection IP20

General technical data		
product designation		PROFIBUS DP/AS-Interface Link
protection class IP		IP20
type of electrical connection of the AS-Interface		Screw-type connection
type of voltage supply		via AS-i
consumed current - from profile conductors of the AS-Interface - at 30 V maximum	mA	200
power loss [W]	W	4.5
insulation voltage rated value	V	500
product feature redundancy capability note		Yes in connection with Y-Link
product function suitable for AS-i Power24V note		No from product status 2 / firmware V3.1
product function - web-based management - diagnostics via email - galvanic isolation		No No Yes
display version as status display by LED		PWR, APF, CER, AUP, CM, BF, SF
type of configuration of the AS-Interface		Set pushbutton on device, STEP7, GSD, command interface
Communication/ Protocol		
version of the AS-Interface specification		V 3.0
AS-Interface master profile is supported		M4 (in acc. with AS-interface specification V 3.0)
type of data transmission		PROFIBUS
number of interfaces - as AS-Interface - according to RS 485 - according to Industrial Ethernet - according to PROFINET - according to wireless - according to USB - other		1 1 0 0 0 0 0
product component optical interface		No
protocol is supported - ASIsafe (Safety at work) protocol - PROFIsafe protocol - PROFIBUS protocol - PROFINET IO protocol		No No Yes No

• PROFINET CBA protocol		No
• TCP/IP		No
• SNMP		No
standard for wireless communication IEEE 802.11		No
Inputs/ Outputs		
number of inputs for AS-Interface maximum		496
number of outputs for AS-Interface maximum		496
number of AS-i devices per AS-Interface maximum		62
bus cycle time of the AS-Interface		
• for 31 devices	ms	5
• for 62 devices	ms	10
access to digital I/O data		via process image/peripheral addresses
access to analog I/O data		via data record transfer
Mechanical data		
width	mm	90
height	mm	80
depth	mm	62
fastening method		snap-on fastening on 35 mm DIN rail
module format		IP20
Ambient conditions		
ambient temperature		
• if installed on horizontal mounting rail during operation	°C	0 ... 60
• if installed on vertical mounting rail during operation	°C	0 ... 45
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
relative humidity at 25 °C during operation maximum	%	95
installation altitude at height above sea level maximum	m	2 000
Safety related data		
suitability for use safety-related function		No
explosion protection marking for intrinsic safety of related equipment		
• EEx ia		No
• EEx ib		No
explosion protection category for gas		II 3 G Ex ec IIC T4 Gc
explosion protection category for dust		none
Certificates/ approvals		
General Product Approval		EMV



FM



For use in hazardous locations	Test Certificates	other	Environment
		Special Test Certificate	Confirmation
			Environmental Confirmations

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)


<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=6GK1415-2AA10>

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=6GK1415-2AA10>

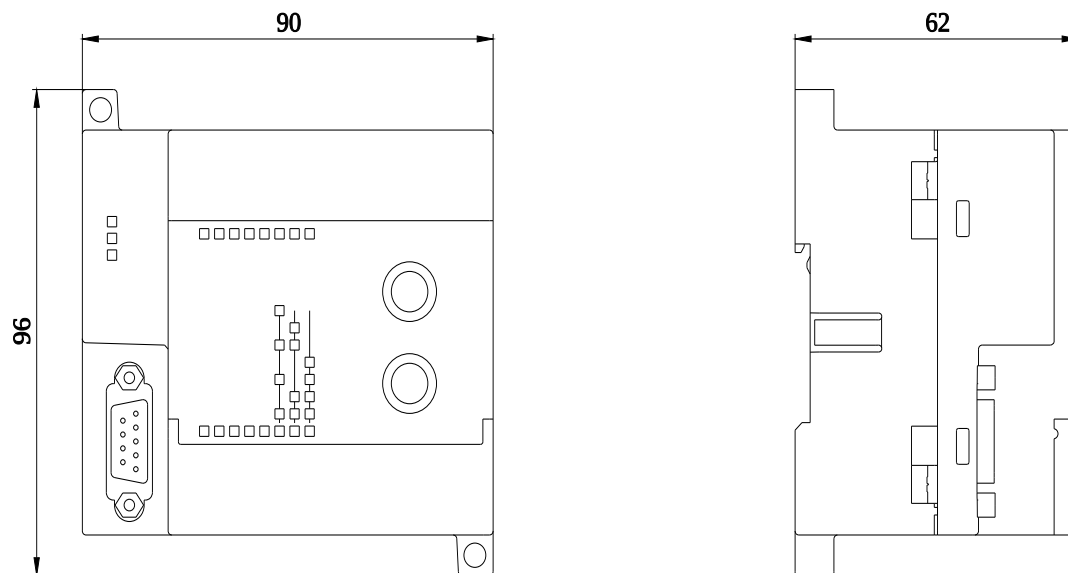

last modified:

10/22/2025 