
FIELD INSTALLATION QUICK GUIDE

Installation Instructions

330850-91-00

25 mm Proximitor sensor



PRODUCT	330850-91-00
FAMILY	3300 XL 25 mm Proximity Transducer
FUNCTION	25 mm Proximitor sensor
STATUS	Verify exact installed equipment

Prepared by Amikon Limited from 3300 XL Proximity Transducer documentation. This guide supplements the complete manufacturer manual and site procedure.

01 CONFIRM THE ORDERED CONFIGURATION

System Length	9 m
Mounting Option	DIN rail
Approval Option	No approvals
Input System	3300 XL 25 mm probe and cable
Supply Without Barriers	-17.5 to -26 V DC
Supply With Barriers	-23 to -26 V DC

02 PREPARATION AND CONNECTION

- Confirm the complete 330850-91-00 article number and installed revision.
- Isolate applicable electrical and process energy using the approved site procedure.
- Record every connector, cable, terminal, shield and protective-earth connection before removal.
- Install without forcing keyed parts, then secure terminals, latches, fasteners and cable supports.

03 OFFICIAL INSTALLATION REFERENCE

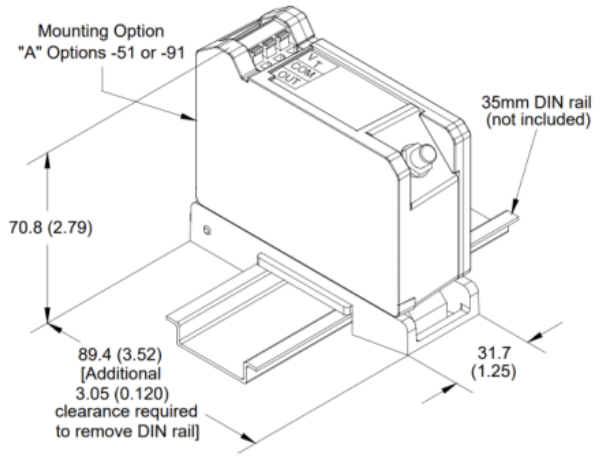


Figure 19: 330850 DIN Mount 3300 XL 25mm Proximitor Sensor

Baker Hughes

Official manufacturer page reproduced at its original aspect ratio.

04 COMMISSIONING CHECKS

01	Confirm product identity and mechanical seating.
02	Verify the documented supply before energising.
03	Inspect polarity, shielding and protective-earth connections.
04	Restore power in the approved sequence and observe status indications.
05	Test each connected input, output or communication path.
06	Record diagnostics and functional-test results before return to service.

05 CONTROLLED DOCUMENT

Official source	Baker Hughes 3300 XL 25 mm Proximity Transducer System Datasheet 163236 Rev. M
Product record	330850-91-00
Manufacturer	3300 XL Proximity Transducer
Warranty	12 months from AMIKON
Support	INFO@AMIKON.CN

AMIKON PRODUCT SUPPORT

+86-18020776786 INFO@AMIKON.CN **AMIKONG.COM**