

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Reference package for procurement and maintenance review

SIEMENS

6SL3544-0FA20-1PA0

PROFIBUS DRIVE CONTROL UNIT

Used with the applicable SINAMICS G120D CU240D DP configuration.

REFERENCE PACKAGE

OFFICIAL DOCUMENT


Selected official manufacturer pages follow this cover.

Source: Siemens SINAMICS G120D CU240D DP manufacturer documentation; applicable pages 188, 189, 190

Distributed inverters 0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units

Integration

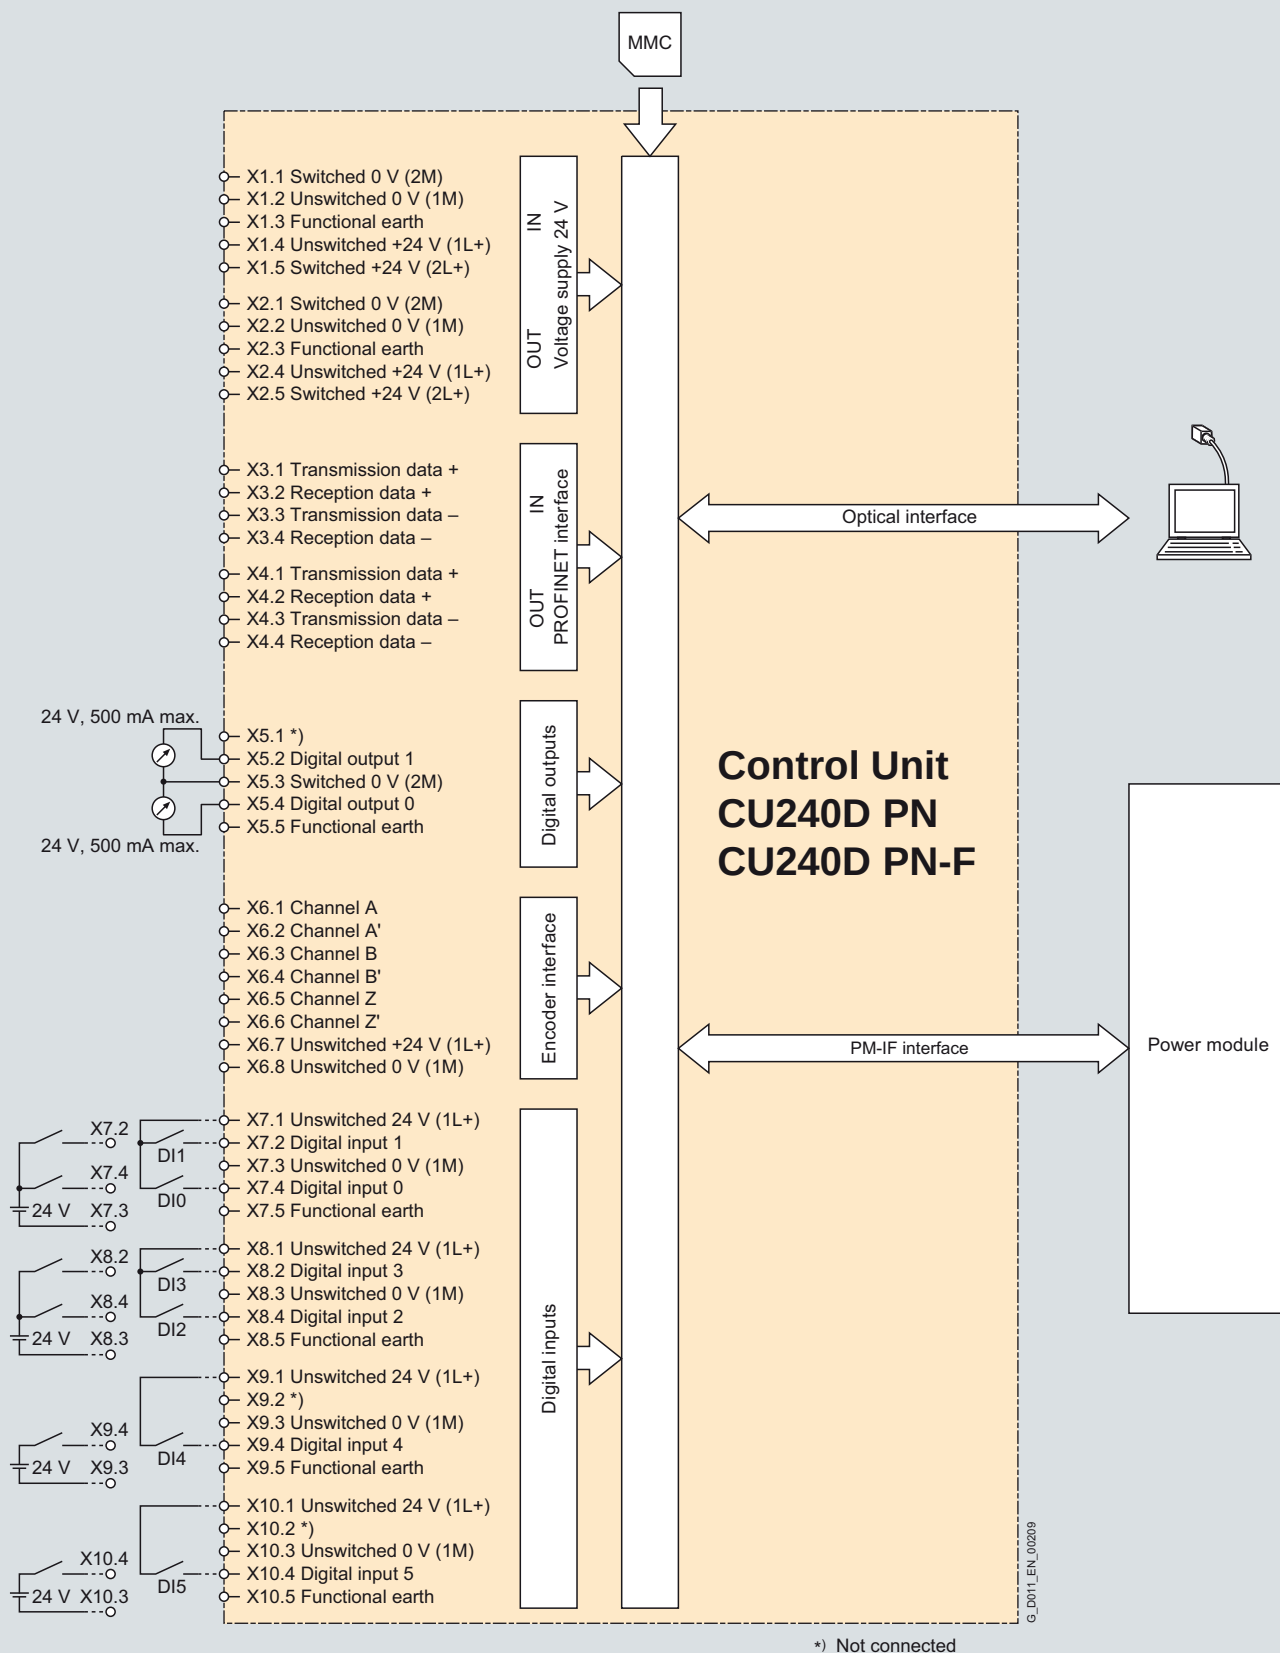

Connection diagram for CU240D PN and CU240D PN-F Control Units

Technical specifications

Control Unit	CU240D DP 6SL3544-0FA20-1PA0	CU240D PN 6SL3544-0FA20-1FA0	CU240D DP-F 6SL3544-0FA21-1PA0	CU240D PN-F 6SL3544-0FA21-1FA0
Electrical specifications				
Operating voltage	external 24 V DC necessary	external 24 V DC necessary	external 24 V DC necessary	external 24 V DC necessary
Current consumption ¹⁾ (from the 24 V supply)				
• with Power Module frame sizes FSA and FSB	200 mA	350 mA	200 mA	350 mA
• with Power Module frame size FSC	350 mA	500 mA	350 mA	500 mA
Interfaces				
Digital inputs	6	6	6	6
Digital outputs (0.5 A, fed through switched 24 V DC)	2	2	2	2
Bus interface	PROFIBUS DP	PROFINET	PROFIBUS DP, PROFIsafe	PROFINET, PROFIsafe
Encoder interfaces (HTL incremental interface, bipolar up to 2048 pulses, max. 100 mA)	1	1	1	1
PTC/KTY interface (connection via Power Module)	✓	✓	✓	✓
• Motor temperature sensor	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click	1 input, sensors that can be connected: PTC, KTY or Thermo-Click
Control of a mechanical motor brake (connection via Power Module)	✓	✓	✓	✓
MMC memory card slot	✓	✓	✓	✓
RS232 interface (connected with RS232 interface cable or USB interface cable via the optical interface of the Control Unit)	✓	✓	✓	✓
Safety functions				
Integrated safety functions Acc. to Category 3 of EN 954-1 and acc. to SIL 2 of IEC 61508	–		• Safe Stop 1 (SS1) • Safely Limited Speed (SLS) • Safe Torque Off (STO) • The safety functions "Safely Limited Speed" and "Safe Stop 1" are not certified for pull-through loads such as e.g. hoisting gear and unwinders.	• Safe Stop 1 (SS1) • Safely Limited Speed (SLS) • Safe Torque Off (STO) • The safety functions "Safely Limited Speed" and "Safe Stop 1" are not certified for pull-through loads such as e.g. hoisting gear and unwinders.
Open-loop/closed-loop control techniques				
V/f linear/square/parameterizable	✓	✓	✓	✓
V/f with flux current control (FCC)	✓	✓	✓	✓
Vector control, without encoder	✓	✓	✓	✓
Vector control, with encoder	✓	✓	✓	✓
Torque control, without encoder	✓	✓	✓	✓
Torque control, with encoder	✓	✓	✓	✓

¹⁾ The current consumption of connected encoders and sensors (total, max. 300 mA) as well as the current drawn from the digital outputs must be added.

SINAMICS G120D

Distributed inverters 0.75 kW to 7.5 kW (1.0 hp to 10 hp)

CU240D Control Units

Technical specifications

Control Unit	CU240D DP 6SL3544-0FA20-1PA0	CU240D PN 6SL3544-0FA20-1FA0	CU240D DP-F 6SL3544-0FA21-1PA0	CU240D PN-F 6SL3544-0FA21-1FA0
Software functions				
Fixed frequencies	16, parameterizable	16, parameterizable	16, parameterizable	16, parameterizable
Signal interconnection with BICO technology	✓	✓	✓	✓
Automatic restart after line supply failure or operational fault	✓	✓	✓	✓
Positioning down ramp	✓	✓	✓	✓
Slip compensation	✓	✓	✓	✓
Free function blocks (FFB) for logic and arithmetic operations	✓	✓	✓	✓
Ramp smoothing	✓	✓	✓	✓
3 selectable drive data sets	✓	✓	✓	✓
3 selectable command data sets (CDS) (manual/auto)	✓	✓	✓	✓
Flying restart	✓	✓	✓	✓
JOG	✓	✓	✓	✓
Technology controller (PID)	✓	✓	✓	✓
Thermal motor protection	✓	✓	✓	✓
Thermal inverter protection	✓	✓	✓	✓
Setpoint input	✓	✓	✓	✓
Motor identification	✓	✓	✓	✓
Motor holding brake	✓	✓	✓	✓
Mechanical specifications and ambient conditions				
Degree of protection	IP65	IP65	IP65	IP65
Operating temperature	−10 ... +55 °C (14 ... 131 °F)	−10 ... +50 °C (14 ... 122 °F)	0 ... 55 °C (32 ... 131 °F)	0 ... 50 °C (32 ... 122 °F)
Storage temperature	−40 ... +70 °C (−40 ... +158 °F)	−40 ... +70 °C (−40 ... +158 °F)	−40 ... +70 °C (−40 ... +158 °F)	−40 ... +70 °C (−40 ... +158 °F)
Relative humidity	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible	< 95 % RH, condensation not permissible
Dimensions				
• Width	150 mm	150 mm	150 mm	150 mm
• Height	210 mm	210 mm	210 mm	210 mm
• Depth	40 mm	40 mm	40 mm	40 mm
Weight, approx.	0.7 kg	0.7 kg	0.7 kg	0.7 kg