

MANUFACTURER DOCUMENT PACKAGE

Manufacturer's Manual

Reference package for procurement and maintenance review

BENTLY NEVADA

200150-06-05

200150 ACCELEROMETER

Used with the applicable Trendmaster Pro Vibration Monitoring System configuration.

REFERENCE PACKAGE

OFFICIAL DOCUMENT

Selected official manufacturer pages follow this cover.

Source: Bently Nevada 200150, 200155 and 200157 Accelerometers Datasheet 164986 Rev. Y

200150, 200155 and 200157 Accelerometers

Datasheet

Cordant™

164986 Rev. Y



Description

The 20015x Accelerometers are general purpose, wide frequency, case-mounted seismic transducers designed for use with Trendmaster ProTIMs.

The 200150 Accelerometer also operates with the Trendmaster 2000 system. The accelerometer interfaces with the 200100 Dual Acceleration to Velocity flexiTIM Module and the 89130-01 Acceleration-to-Velocity TIM (Transducer Interface Module), as well as the 1900/25 and 1900/27 monitors.

The 20015x Accelerometers feature a hermetically sealed, stainless steel case. This design provides an extremely rugged transducer that is well suited for harsh industrial environments. The transducer's top-mounted, 5-pin connector allows you to easily install and remove the interconnecting signal cable. A 3/8-24 threaded hole on the bottom of the sensor's casing accommodates several mounting options.

The 20015x Accelerometers contain a piezoelectric sensing device that generates a charge when it is subjected to vibration. The accelerometers electronically convert this charge to a differential voltage signal that is proportional to the acceleration that is parallel to the sensitive axis of the transducer.



Baker Hughes 

Specifications

All specifications are at +25°C (+77°F), unless otherwise specified.

Electrical

Sensitivity @ 80 Hz ($\pm 12\%$)	10.2 mV/(m/s ²) (100 mV/g)
------------------------------------	--

Measurement Range

Accelerometer	Measurement Range in m/s ² (g)
200150	± 245 (± 25)
200155	± 196 (± 20)
200157	± 245 (± 25)

Frequency Range Referenced to 80Hz ($\pm 10\%$)

Accelerometer	Frequency Range in Hz (cpm)
200150	10 to 1000 (600 to 60,000)
200155	2.0 to 10,000 (90 to 600,000)
200157	10 to 10,000 (600 to 600,000)

Mounted Resonant Frequency	>20 kHz (>1200 kcpm)
Amplitude Linearity (1 to 10g pk)	$\pm 2\%$
Transverse Sensitivity	$\leq 7\%$

Settling Time (Within 5% of Bias)

Accelerometer	Settling Time (ms)
200150	≤ 300

200155(1)	≤ 2000
200157	≤ 300



(1) Because of its long settling time, you can use the 200155 only with low frequency acceleration-to-velocity channel types on a ProTIM, DSM, or System I system.

Excitation Voltage	4.7 to 5.5 Vdc
Polarity (Acceleration from Base to Connector)	SIG+ positive with respect to SIG-.
Quiescent Current	<800 μ A
Output Bias Voltage	+2.5 $\pm$ 0.23 Vdc

Broadband Electrical Noise (1 Hz to 15 kHz)

Accelerometer	Measurement Range in mm/s ² (mg)
200150	14.7 (1.5)
200155	24.5 (2.5)
200157	14.7 (1.5)

Electrical Isolation	600 Vrms
----------------------	----------

Environmental

Axial Shock Limit	49,050 m/s ² pk (5,000 g pk)
Temperature Range	-40°C to +105°C (-40°F to +221°F)
Sealing (Hermetic)	5X10 ⁻⁸ atm•cc/s (3.1X10 ⁻⁹ atm•in ³ /s), maximum

Relative Humidity	100% relative, condensing, non-submerged
-------------------	--

Physical

Size (Hex x Height)	17.5 mm x 45.7 mm (11/16 in x 1.8 in)
Weight	58 g (2.0 oz), typical
Mounting Thread	3/8-24 female
Mounting Torque	2.7 to 6.8 N•m (2 to 5 ft•lbf)
Sensing Element	Ceramic
Sensing Geometry	Shear

Housing and connector material

200150	316L stainless steel
200155	316L stainless steel
200157	316L stainless steel

Electrical Connector (Top)	5-pin 1/2-20
----------------------------	--------------

Cables

Operating Temperature Range	-20°C to +100°C (-4°F to +212°F) These cables may be used at lower temperatures if the installation prevents the cable from flexing or bending. Flexing these cables at temperatures below -20°C (-4°F) may damage the cables.
Construction	4-conductor, 22 AWG with braided shield and drain wire (85% coverage, minimum), PVC outer jacket. Nickel-plated coupling nuts.
Seal	Connectors provide an IP67 seal to transducers and mating hardware. Connectors are molded to the cable. The addition of DC4 electrical insulating compound in the connectors provides additional protection against moisture during a thermal shock.

Minimum Bend Radius

200151	63.5 mm (2.5 in)
200152	73.7 mm (2.9 in)
Maximum Cable Length	25 m (82 ft) Custom products may be able to provide longer cable lengths for the 200150 and 200157 accelerometers.

Adhesive (see Mounting Hardware Options)

Temperature Range	-55°C to +121°C (-67°F to +250°F)
Cure Time	24 hours

Ordering Information



For the detailed listing of country and product specific approvals, refer to the *Approvals Quick Reference Guide* (108M1756) available from Bently.com.

200150-AA-BB

General Purpose Trendmaster 2000 or Trendmaster Pro Accelerometer

200155-AA-BB

Low Frequency Trendmaster Pro Accelerometer

200157-AA-BB

Enveloping Trendmaster Pro Accelerometer

Refer to Table 6 for detailed specifications.

A: Mounting Stud Option

00	No mounting stud provided
01	3/8-24 thread, 2 adhesive mount frames with adhesive
02	3/8-24 to 3/8-24 UNF 1-3/8 inch hex plate stud
03	3/8-24 to 1/2-20 UNF 1-3/8 inch hex plate stud
04	3/8-24 to 1/4 NPT 1-3/8 inch hex plate stud
05	3/8-24 to 1/4-28 UNF 1-3/8 inch hex plate stud
06	3/8-24 to 1/4 NPT, 3/4 inch hex stud
07	3/8-24 to 3/8 NPT, 3/4 inch hex stud

08	3/8-24 to 1/2 NPT 1 inch hex stud
09	3/8-24 to 3/4 NPT, 1-1/4 inch hex stud
10	3/8-24 to 1 NPT, 1-3/8 inch hex stud
11	3/8-24 to 1-1/4 NPT, 1-3/4 inch hex stud
12	3/8-24 to 1/4-20 UNC, 3/4 inch hex stud
13	3/8-24 to 5/16-18 UNC, 3/4 inch hex stud
14	3/8-24 to 3/8-24 UNF, 3/4 inch hex stud
15	3/8-24 to 3/8-16 UNC, 3/4 inch hex stud
16	3/8-24 to 1/2-13 UNC, 3/4 inch hex stud
17	3/8-24 to 3/8-16 UNC 1-3/8 inch hex plate stud
18	3/8-24 to M8x1 1-3/8 inch hex plate stud
19	Quick-Set XDCR adapter, 1-inch hex stud
20	3/8-24 thread, 1 magnetic mount base
21	3/8-24 outer diameter to M6x1 inner diameter 1-3/8 inch hex plate stud
22	3/8-24 to M8x1.25 1-3/8 inch hex plate stud
23	3/8-24 to M16x2.0 1-3/8 inch hex plate stud

B: Approvals


05	Multiple Approvals (CSA, ATEX, and IECEx)
-----------	---

Graphs and Figures

Note: All dimensions shown in millimeters (inches) except as noted.

Table 1: Mounting Stud Specifications

Option "A"	Stud Length in mm (in)	Recommended Torque in N•m (in•lbf)	Maximum Torque in N•m (in•lbf)	Replacement Part Number	Notes
0 1	N/A	N/A	N/A	04284020	2 adhesive mount frames with adhesive
0 2	6.0 (0.235)	N/A	22.6 (200) for curved mounting surface, 45.2 (400) for flat mounting surface	107756-01	See Figure 1
0 3	12.1 (0.475)	N/A	22.6 (200) for curved mounting surface, 45.2 (400) for flat mounting surface	107755-01	See Figure 1
0 4	16.5 (0.650)	N/A	22.6 (200) for curved mounting surface, 45.2 (400) for flat mounting surface	107754-01	See Figure 2
0 5	8.3 (0.325)	N/A	7.3 (65) for curved mounting surface, 14.6 (130) for flat mounting surface	128038-01	See Figure 1
0 6	18.2 (0.715)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-01	See Figure 3
0 7	18.4 (0.725)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-02	See Figure 3
0 8	23.0 (0.905)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-03	See Figure 3
0 9	23.2 (0.915)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-04	See Figure 3
10	28.1 (1.105)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-05	See Figure 3
11	28.8 (1.135)	16.9 to 22.6 (150 to 200)	22.6 (200)	131563-06	See Figure 3
12	11.6 (0.457)	16.9 to 22.6 (150 to 200)	22.6 (200)	131562-01	See Figure 4
13	13.0 (0.512)	16.9 to 22.6 (150 to 200)	22.6 (200)	131562-02	See Figure 4

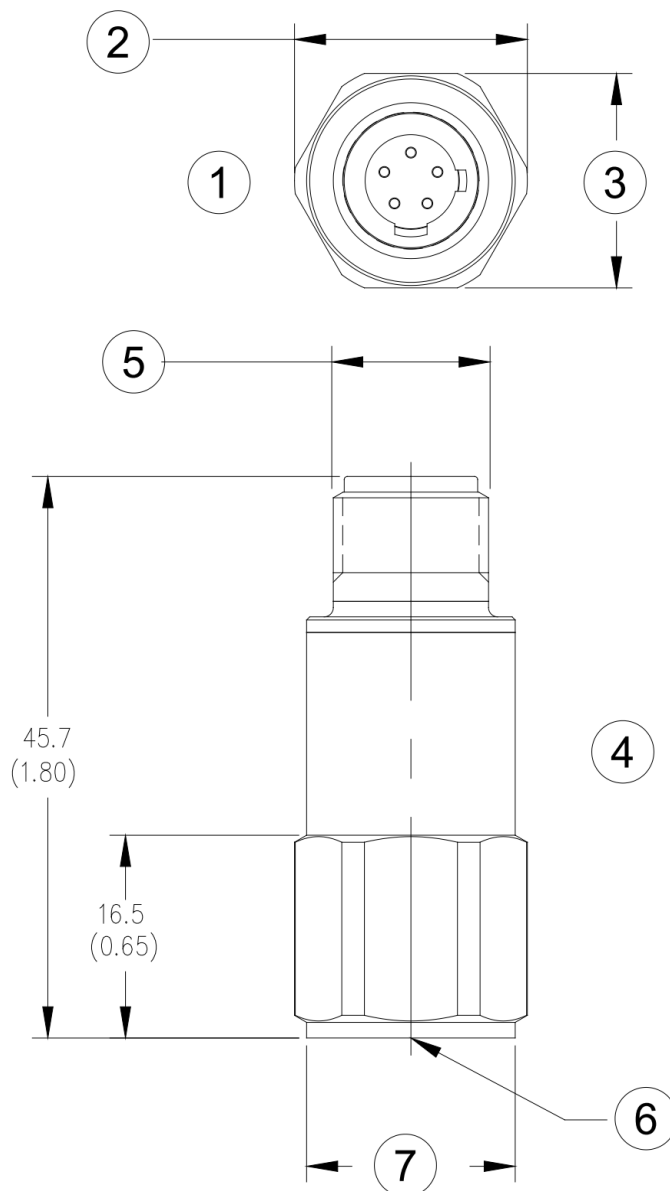

- 1. Top view
- 2. 19.1 mm (0.750 in) across corners
- 3. 11/16-inch hexagonal
- 4. Side view
- 5. 1/2-20 UNC-2A 5-pin connector
- 6. 3/8-24 UNF-2B threads, 7.1 mm (0.28 in) deep, minimum
- 7. 17.0 mm (0.67 in) diameter, typical

Figure 16: Accelerometer Dimensional Drawing

200150

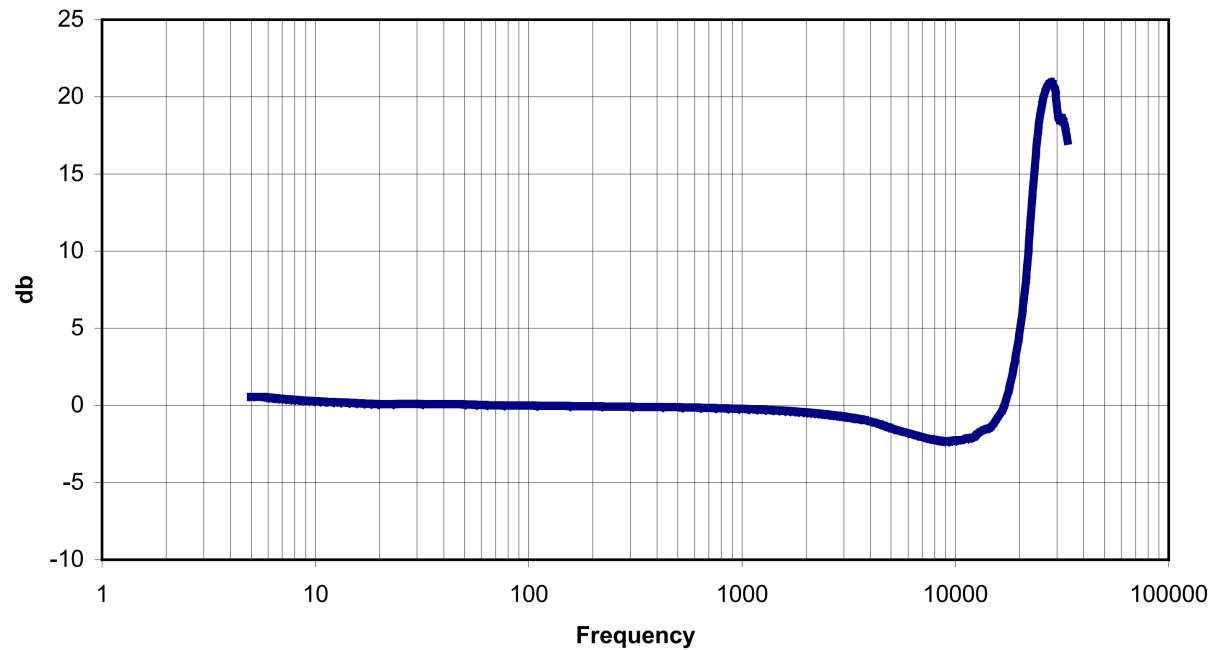


Figure 17: 200150 Amplitude Frequency Response (Typical)

200150

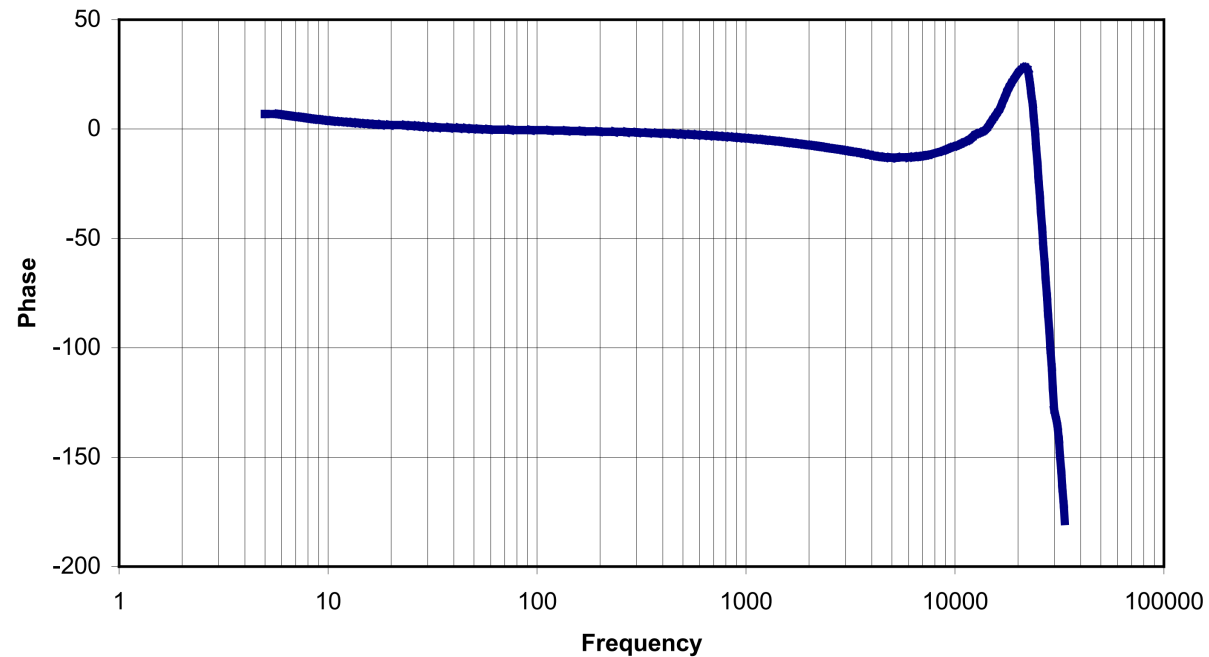


Figure 18: 200150 Phase Frequency Response (Typical)